PT-E550WVP

In addition to the extensive range of TZe tapes in various colours and sizes, special tapes for industrial use have been developed for specific labelling tasks.



Flexible-ID Tape Use on curved sufaces, sharp bends or cvlindrical surfaces.



Strong Adhesive Tape Use on uneven, rough and textured surfaces.



Heat-shrink tube Shrinks and grips cable when heat is applied.

Technical Specifications

Hardware		PC Software Main Features	
Display Type Interfaces Print Speed Maximum Tape Width Maximum Print Height Cutter Type Battery Type	16 chrs x 3 lines backlit graphic LCD with Print preview USB 2.0, Wi-Fi, Wireless Direct 30mm / second (maximum) 24mm 18mm Automatic (Full & Half) BA-E001 Li-ion rechargeable battery (supplied) 6 x AA alkaline/rechargeable batteries (LR6/HB6 - not supplied)	Supported Operating Systems Cable Labelling Wizard Font Faces Font Styles Image Import Screen capture Frames Barcodes Included Items	Windows [®] Vista, Windows [®] 7, Mac OS [®] X 10.6 or greater Yes All installed true-type fonts 12 JPG, BMP, TIFF and other Por Yes 153 21 protocols including 1D/2D
Label Creation		In the Box	PT-E550WVP labeller
Dedicated Labelling Functions Fonts Maximum Lines per Label Maximum text blocks Symbols	Functions block, Cable wrap, Cable flag, Heat shrink tube, Serialise (automatic number incrementation) Fonts 14 fonts, 10 styles, 6 - 48 point size 7 (on 24mm width tape cassette) 99 Symbols 384	Supplies	24mm Black on Yellow Strong cassette (8m) 12mm Black on White Flexible Li-ion Rechargeable battery AC adapter Label design software and Pri CD-ROM USB cable, wrist strap and us
Frames Barcodes Automatic numbering Copy Printing	7 9 protocols 1-99 1-99	Tape type /Tape widths	TZe tape cassettes: 3.5, 6, 9, 12, HSe tube cassettes: 5.8, 8.8, 11.7 HGe tape cassettes: 6, 9, 12, 18,
Vertical Text Printing	Yes	Optional Accessories	
Rotated text printing Memory	Rotate once, Rotate and repeat	Batteries	BA-E001 Li-ion Rechargeable AA alkaline/rechargeable batte
Maximum Characters per Label	1500	AC Adapter Weight and Dime	AD-ES AC adapter
Label Memory Locations	99	-	126mm (W) x 250mm (H) x 94







Label images shown are for illustrative purposes only and some aspects may not be reproducible on this model. Product specifications may be subject to change

are Main	Features	
erating	Windows [®] Vista, Windows [®] 7, Windows [®] 8, Mac OS [®] X 10.6 or greater	
y Wizard	Yes	
	All installed true-type fonts	
	JPG, BMP, TIFF and other Popular types	
1	Yes	
	153	
	21 protocols including 1D/2D barcodes	
tems		
	PT-E550WVP labeller 24mm Black on Yellow Strong Adhesive tape cassette (8m) 12mm Black on White Flexible ID tape (8m) Li-ion Rechargeable battery AC adapter Label design software and Printer driver CD-ROM USB cable, wrist strap and user guide	
e widths	TZe tape cassettes: 3.5, 6, 9, 12, 18, 24mm HSe tube cassettes: 5.8, 8.8, 11.7, 17.7, 23.6mm HGe tape cassettes: 6, 9, 12, 18, 24mm	
ccessories		
	BA-E001 Li-ion Rechargeable battery	

ole battery atteries (LR6/HR6)

94mm (D) 1.05kg



53072-PT-E550wwp September 5, 2014 7:14 PM

PT-E550WVP






Industrial PC Labeller

Create durable labels for electrical or datacom installations, via easy-to-use built-in labelling functions, PC software or from your smartphone or tablet with Brother Mobile Cable Label App.

Large backlight graphic display

- Prints 3.5, 6, 9, 12, 18 and 24mm TZe laminated Tapes
- Prints 5.8, 8.8, 11.7, 17.7, 23.6mm Heat shrink tube Supports HGe laminated Tapes
- Advanced cutter (including half cutter) for easy-to-peel labels • Includes 2 tape cassettes, AC adapter, Lithium-ion Battery, USB cable, hand strap and Tough carrying case



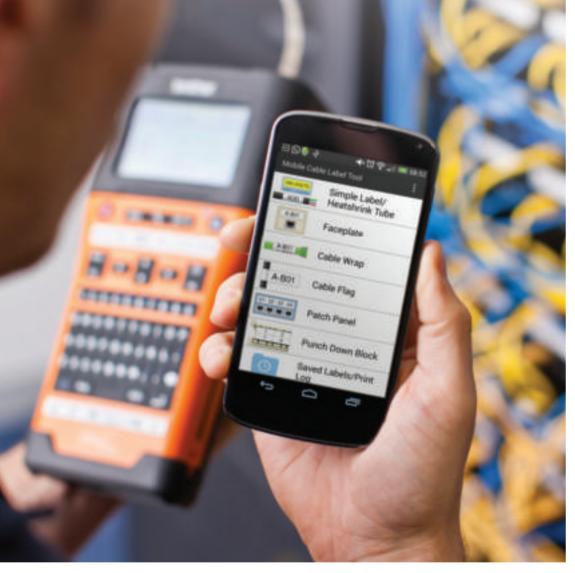

P-touch laminated labels – designed to last

Brother P-touch laminated TZe tapes are available in many different colours and sizes. The thermal transfer ink is sandwiched between two protective layers of PET (polyester film), protecting the text against the effects of liquids, abrasion, temperature, chemicals and sunlight. As the labels have been tested to the extreme, you can be confident of a Professional quality label that has been designed to last.



PT-E550WVP

Ensuring cables, conduits, switches and sockets are clearly identified with long lasting, durable labels is essential for electricians, datacom, telecom and security equipment installers.



Wide variety of Print width Prints TZe laminated labels from 3.5 to 24mm HGe laminated labels from 6 to 24mm Heat Shrink Tube labels from 5.8 to 23.6mm



Large backlit graphic LCD Easy to view symbols with print preview of your label before printing.



Sequential numbering Print labels containing a sequence of numbers or letters.



384 built-in symbols

Includes common electrical, datacom, AV, security and safety symbols









Print preview Preview your labels before print



Special label functions Easy to create General, Faceplate Cable flag/wrap, Patch panel and Punch down block labels



Database search/merge/print Upload data from your PC to print labels on-site



USB & Wi-Fi Print from PC or mobile wirelessly