

DPH-850S

Android IP Video Phone
Ver:1.00

Android IP Video Phone DPH-850S Quick Installation Guide



D-Link[®]

Smart VoIP

1

D-Link

Instruction



DPH-850S

Android IP Video Phone

Overview

Included Accessories



Android IP Video
Phone DPH-850S



Handset



Power adaptor



Handset cord



Quick Installation Guide



Ethernet Cable




CD-ROM(containing
Manual and Quick
Installation Guide)



Warranty & Safety
Information

2 The Appearance of Product


Front view and keypad function:

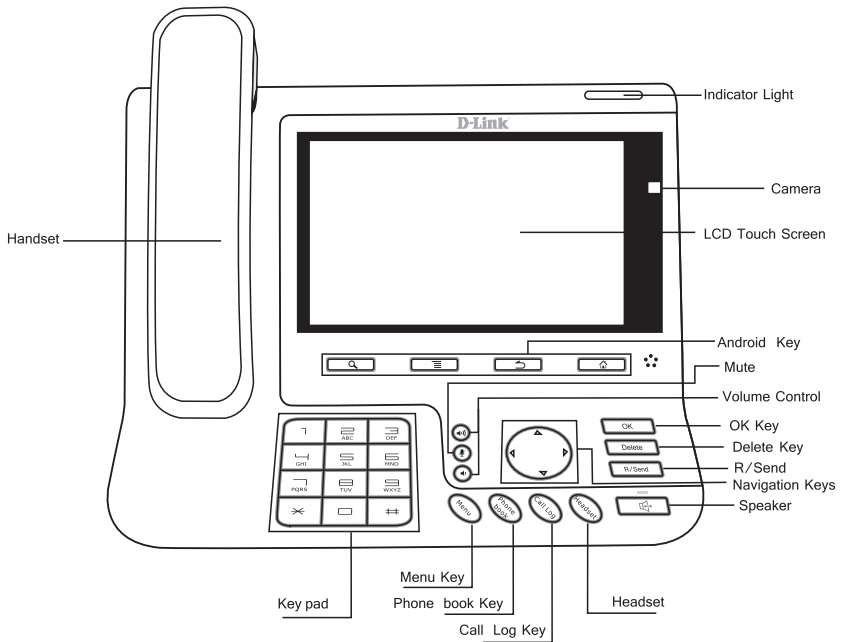

3 Connecting IP Phone

Connect the IP Phone as shown by the following diagram:

Wide Area Network/Internet

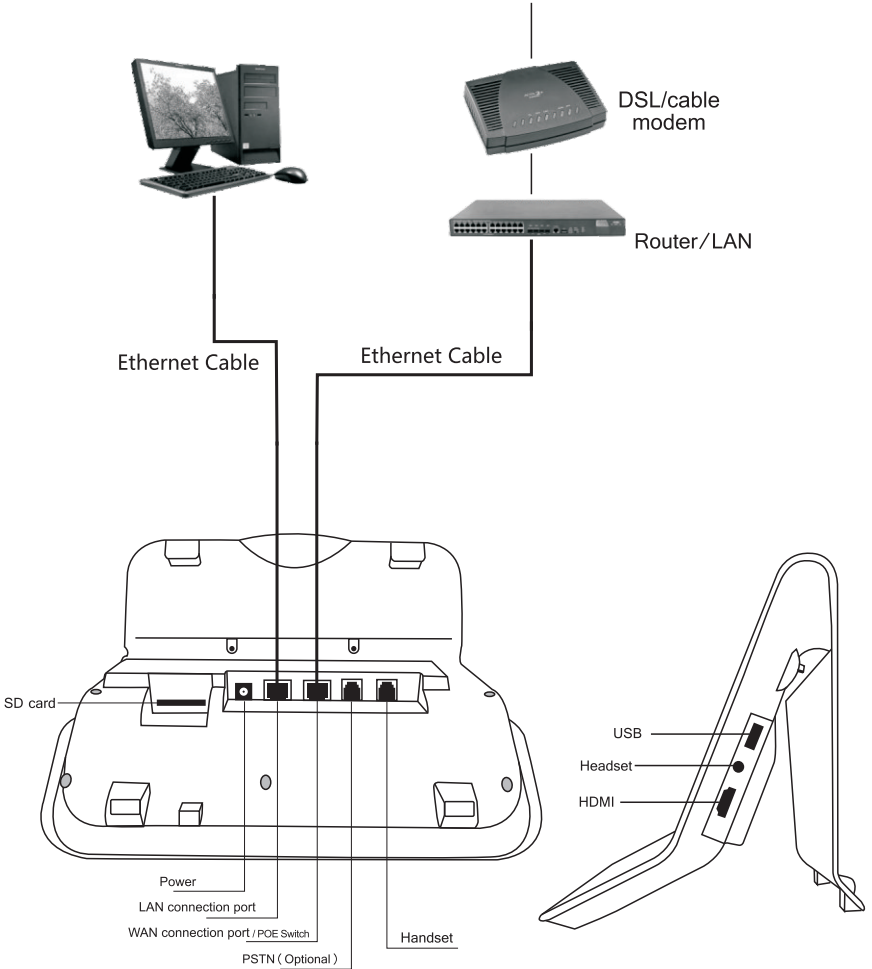


4 Configuration

Configuring via Web


Drag status bar, and you would get the phone's network IP parameters.

Open web browser and input the IP with :8080, such as `http://192.168.1.1:8080/` in the address bar. You would get ready to enter web interface and set up.

The default username and password are "admin".

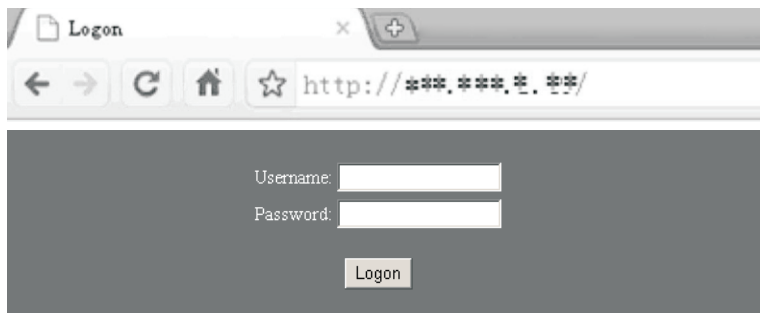

Please see the following screen after login. Include BASIC, NETWORK, VOIP, PHONE and so on.

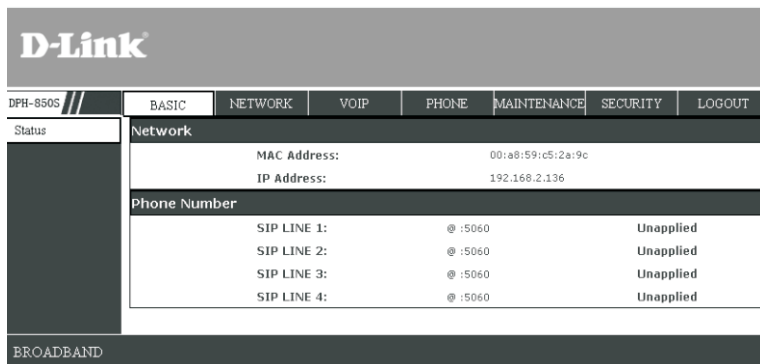

D-Link

DFH-850S //

	BASIC	NETWORK	VOIP	PHONE	MAINTENANCE	SECURITY	LOGOUT
Status	Network						
	MAC Address:		00:a8:59:c5:2a:9c				
	IP Address:		192.168.2.136				
	Phone Number						
	SIP LINE 1:		@ :5060	Unapplied			
	SIP LINE 2:		@ :5060	Unapplied			
	SIP LINE 3:		@ :5060	Unapplied			
	SIP LINE 4:		@ :5060	Unapplied			

BROADBAND

5 Configuration

VoIP Settings

Choose VoIP-SIP get voip account

Get VoIP account from VoIP service provider. Then configure SIP server address, server port, account name, password, and phone number. Finally, enable register and apply.

The screenshot shows the D-Link configuration page for VoIP settings. The interface includes a navigation menu with tabs for BASIC, NETWORK, VOIP, PHONE, MAINTENANCE, SECURITY, and LOGOUT. The VOIP tab is selected. On the left, there is a sidebar with 'SIP' and 'Stun' options. The main content area is titled 'SIP Line Select' and shows a dropdown menu with 'SIP 1' selected and a 'Load' button. Below this is the 'Basic Setting' section, which contains various configuration fields:

Register Status:	Unapplied	Display Name:	<input type="text"/>
Server Name:	<input type="text"/>	Proxy Server Address:	<input type="text"/>
Server Address:	<input type="text"/>	Proxy Server Port:	<input type="text"/>
Server Port:	5060	Proxy Username:	<input type="text"/>
Account Name:	<input type="text"/>	Proxy Password:	<input type="text"/>
Password:	<input type="text"/>	BackUp Server Address:	<input type="text"/>
Phone Number:	<input type="text"/>	BackUp Server Port:	<input type="text"/>
Enable Register:	<input type="checkbox"/>	Domain Realm:	<input type="text"/>

At the bottom of the 'Basic Setting' section, there are two buttons: 'APPLY' and 'Advanced Set'.

Configuring via lcd menu

Network Settings

Enter lcd menu, and choose and press "settings".

Choose and press "WAN". Enter Ethernet configuration and select DHCP or Static IP based your network access mode. If you use xDSL, press "PPPoE Set" for set up user name/password. And enable "connect when boot complete".

VoIP Settings

Enter lcd menu, and choose and press "Settings".


Choose and press "Account", and then you will enter Account1. Set up SIP server address, server port, account name, password and phone number. You can press more to change some advanced settings and then back to basic setting. Enable register and save.

6 Make a Phone Call

Phone support 2 media calls: Voice IP call and Video IP call.

Make a call

→ Call via dialing keypad

1. Select the SIP line you want to use (SIP1, SIP2, SIP3, SIP4)
2. Dial the number via keypad or touch screen directly. If you dial the wrong number, just press  to delete it. Or press and hold it for delete all of them.
3. After dialing, press voice or video key.


Answer a call

When you receive a call which is in contact, you could see the contact's name, small pic, number, even location.

Call Services

→ Video Call

There are 3 ways to make/answer video calls:

1. If a incoming call is a Video call, you may see voice and video soft key. Press video, you may answer it with video call.
2. During voice talking, press  to request to start video, if the other party answers, you may start video call with voice.
3. If there is video request, you may press "answer" to accept it, or "reject" to refuse.

Hold/Resume Call

During talking, press "Hold" to hold the current call. And there would be indication on the screen. If you need to resume call, just press "resume".

Transfer

There are 3 ways to make transfer:

1. During talking, press "transfer", and then dial the 3rd number with pressing "send". After the called party answers, press "transfer".
2. During talking, there is incoming call. Press "voice" to answer it. Then press "transfer" to let 2 parties talk to each other.
3. During talking, press "transfer" and enter the 3rd number. Then press "transfer", the 1st call would be transferred to the 3rd number for calling.

3 Way Conference

If there are 2 calls call waiting, press "conference" and choose the number you want to make conference. Then it would be 3 way conference status. If you want to close conference, press "split" to end it and resume call waiting.

DPH-850S	Hazardous Substances					
	Pd	Hg	Cd	VI	PBB	PBDE
Housing	X	O	X	O	O	O
PCBA	X	O	O	O	O	O
Power supply	X	O	O	O	O	O

Notice:

O: The content of hazardous Substances meets the restriction of SJ/T 11363-2006

X: The content of hazardous Substances in part of device is over the restriction of SJ/T 11363-2006,
but it is still in the exception list of Directives 2002/95/E