



75W DC Input Power over Ethernet Midspan Ultra Power over Ethernet Single Port Injector



Features

- IEEE802.3at Compliant
- Diagnostic LEDs
- Gigabit Compatible
- 1 Year Warranty
- Limited Power Source
- DC Input
- Full Protection OCP, OVP
- Single Source 4 Pair Power Current Sharing
- Broken Wire Detection

Applications

- Satellite Receiver
- Wireless Network Access Points
- LCD Displays
- Security Cameras
- Kiosks
- Computer Workstations

Safety Approvals

- CE

Mechanical Characteristics

- Length: 166mm (6.53in)
- Width: 80mm (3.15in)
- Height: 44mm (1.73in)
- Weight: 0.5Kg (1.1lbs)

Output Specifications

Model	DC Output Voltage	Load		Regulation	
		Min.	Max.	Line	Load
POE75D-1UP	+56V	15mA	1.34A	54-57V DC under all conditions	

INPUT:**DC Input Voltage Rating**

36 to 72V DC

DC Input Current

4.0A, 32V DC at maximum load

2.0A, 72V DC at maximum load

OUTPUT:**Total Output Power**

75W

Ripple and Regulation

250mV maximum

DC Offset

No data degradation with DC imbalance 18mA per min.

Efficiency

85% (typical) at maximum load, at 48V DC

Transient O/P Voltage Protection

60V maximum

ENVIRONMENTAL:**Temperature**

Operation -20 to +40°C

Non-operation -25 to +65°C

Humidity

Operation 5 to 90%

EMI

FCC Part 15 Class B

EN55022 Class B

Isolation Test

Primary to Secondary: 2121VDC for 1 minute 10mA

Primary to Field Ground: 2121VDC for 1 minute, 10mA

Secondary to Field Ground: 2121VDC for 1 minute, 10mA
(4 Second Ramp up Time)**Warranty**

1 Year

Immunity

ESD: EN61000-4-2 Level 3

RS: EN61000-4-3 Level 3

EFT: EN61000-4-4 Level 2

Surge: EN61000-4-5 Level 2

Insulation Resistance

Primary to Secondary: >10M OHM 500VDC

Primary to Field Ground: >10M OHM 500VDC

IEEE 802.3af/at Interoperability

If 25kohm is detected the unit operates in "IEEE802.3at mode" 33.6W 2 pair powering. 12.5k detection resistance required for full power

UNH Interoperability report available upon request

FEATURE:**Cisco Legacy detection**

No external parts required for Legacy devices:

VoIP Phones:

7910,7912,7940,7960

Access Points:

350,1100,1200

Over Voltage Protection

Conforms to UL 60950-1 paragraph 2.2.3

Over Current, Short Circuit Protection

Outputs equipped with short circuit protection and overload protection as per 802.3at specifications except max average current is 1.34A.

The output can be shorted permanently without damage

MTBF

150K Hours minimum at maximum load, 48VDC, and ambient 25°C

Indicators

Green LED 1: DC Power "OK"

Red LED: Fault detected

Solid Green LED 2: Power detected "CONNECT" at 75W


Flashing Green LED 2: IEEE802.3at mode detected "CONNECT" at 33.6W

Input Connector

-- Anytek OQ0355510000G

Mate – Anytek TJ0350520000G OR TJ035152000G

Anytek is part of Giga-Way Technology Corp.

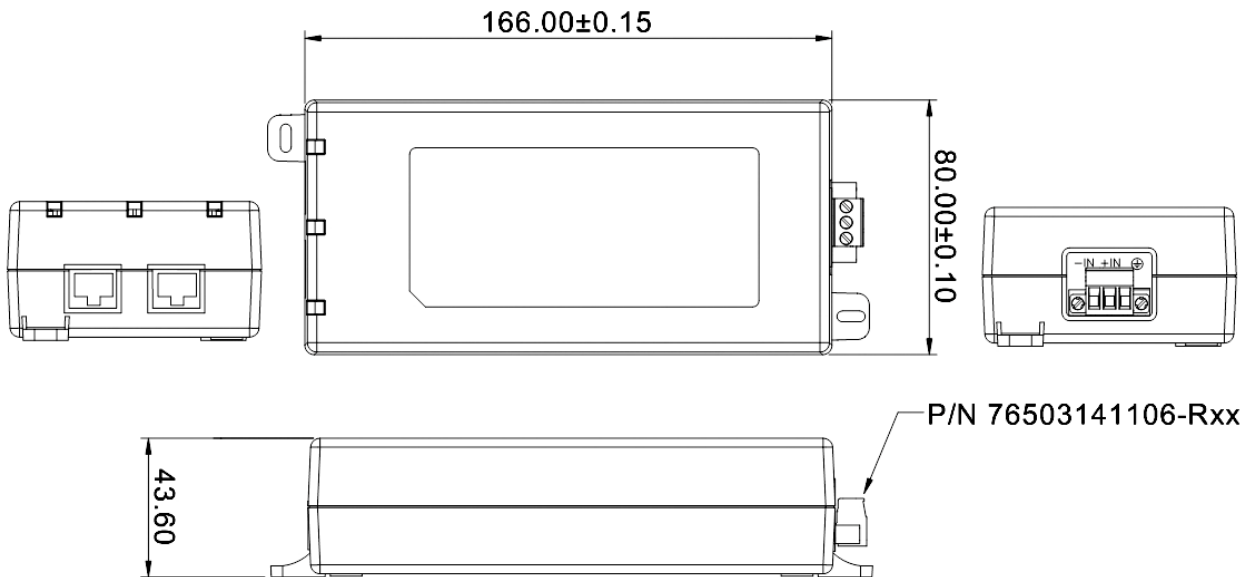

Description of LED Functions for Gigabit Power Injector

Power-up Sequence:

Upon power-up, all 3 LEDs will light for 2 seconds, as part of the self-test for the internal microprocessor software. After the 2 seconds period, the "ON" LED will illuminate green. The DC output voltage is now available for powering a compliant load (to the 802.3at PoE standards).

Detection Sequence:

Once a compliant load is attached to the output RJ45 connector, the green "CONNECT" LED will illuminate. This LED will be solid if connected at 75W and will blink if connected at half power 33.6W.

Should the load be non-compliant then the LEDs will blink a code specific to the cause for non-detection.

Detection Failure Codes:

1. Incorrect resistive signature – The green "CONNECT" and red "FAULT" LEDs will blink 3 times.
2. Incorrect capacitive signature – The green "ON" LED will blink 3 times.
3. Incorrect Voffset – The green "CONNECT" and green "ON" LEDs will blink 3 times.
4. Unstable current measurement – The green "ON" LED will blink 3 times
5. Low voltage sensed during detection (overload) – The red "FAULT" LED will blink 3 times

After the LEDs blink 3 times the Power Injector will continue to try to detect a valid load. Until the correct load is applied, the LEDs will continue to blink. If there is an open circuit connected to the output RJ45 then the LEDs will not blink but the Power Injector will continue to try to detect a valid load.

Fault Sequence:

Should there be a fault such as an overload or short circuit then the red "FAULT" LED will illuminate. The red "FAULT" LED will illuminate for 2 seconds and then go off as the power supply tries to re-detect a valid load. If there is a problem detecting the load, the LED will indicate a possible fault as per the codes in the section above.