

DISCOVER YOUR PHONE

WHAT'S INCLUDED

- +1 SpareOne Plus Phone
- +1 Quick Start Guide
- +1 Lanyard

1) SpareOne

Waterproof up to one meter for 30 minutes

2) Earpiece

3) One AA Energizer Ultimate Lithium battery

Compatible with Alkaline, Lithium, and NIMH batteries.

4) Battery LED

100%-40% life left [*blinks green*]
40%-20% life left [*blinks red*]
Change battery [*blinks fast red*]

5) Antenna/Network LED

Signal Found [*blinks blue*]
Searching [*blinks blue and red*]
No network [*blinks red*]

6) Volume Button

There are three volume levels.
Hold the volume button to adjust.

How to use panic siren

Hold the volume button for 7 seconds.

7) Torchlight Button

How to use the torchlight

Press and release the torchlight button.
Hold the torchlight button for 3 seconds.
[*Light stays on*]
Hold the torchlight button for 10 seconds.
[*SOS signal flashes*]

8) Call Button

How to answer a call

When the phone rings, press the call button to answer.

How to make a call

Enter the phone number using the keypad and press the call button.

How to redial

To redial the last incoming or outgoing call, press the call button two times.
[*Keypad number sounds*]

How to accept /end a second call

In the event of a second incoming call, press the call button to accept the second call. Press the call button again to switch to the first call or press the power button to finish the second call.
[*Beep*]

9) Emergency Button

Hold the emergency button for 2 seconds.
[*Audible Feedback*]

The emergency button is set up to call a pre-set emergency number.
[*Even with no SIM card, you can always call emergency services by pressing the button or by directly dialing 9-1-1, 9-9-9, 1-1-2...*]

How to program

- 1) Press and release the power button.
- 2) Dial the sequence [*#-1-2-3-#*].
- 3) Enter the number to dial when the emergency button is pressed.
- 4) Hold the emergency button for 2 seconds to save the programmed number.
[*Beep*]

10) Power Button

How to power on/off

Press the power button for 2 seconds.
[*Audible Feedback*]

How to end a call

Press and release the power button.
[*Quiet Beep*]

How to reject a call

When the phone rings, press and release the power button.
[*Ringtone Stops*]

How to clear misdialed numbers

Press and release the power button.
[*Quiet Beep*]

11) Keypad

Speed dial

a) You can set 9 speed dial numbers in M1-M9. To set up a speed dial, enter a phone number by using keys 0-9 and then hold one key M1-M9 for 5 seconds to save number.
[*Validation Beep*]

b) To call M1-M9, simply press the desired number for 2 seconds.
[*Audible Feedback*]

12) Microphone

13) Keypad Lock Button

Press for 2 seconds and release keypad lock button.
[*Audible Feedback*]

When keypad is locked, pressed buttons will still beep, but will not dial out.
[*Alert Beep*]

RESPOND WITH TEXT MESSAGE

1) "Call me back"

You can send a "call me back" text with your SpareOne to numbers stored in speed dial memories: Press * for 2 seconds [*Alert Beep*] then press desired speed dial number on M1-M9.
[*Quiet Beep*]
[*Receive second quiet beep if text sent, error tone if no phone number has been set up*]

SAFETY

1) Battery information

SpareOne will work with the provided battery. SpareOne accepts NIMH, Alkaline or Lithium AA batteries. SpareOne will not work with carbon zinc batteries. Talk time and standby time will vary. We recommend using Energizer Ultimate Lithium L91 battery whenever possible for better standby and talk time.


2) Warning

Risk of fire. The battery can explode or leak during charging if installed backwards, disassembled, crushed, or exposed to fire or high temperature. Keep out of reach of children & keep in original package until ready to use. Dispose of used batteries promptly.

SIM CARD

1) Insert SIM card

Open the battery door and insert a SIM card. Make sure the metallic contact is facing down.
[*You can use the 2nd SIM card slot as a storage for a 2nd SIM card*]

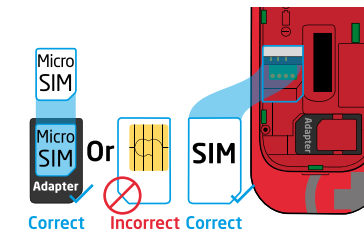

2) Micro SIM card

You can also insert a micro SIM card by using a micro SIM card adaptor.

SERVICE & SUPPORT

1) One-year warranty

Your SpareOne hardware (excluding the AA Battery) is under a 1 year warranty from original date of purchase. We do not warrant against normal wear and tear, nor damage caused by accident or abuse. To obtain service, call SpareOne or visit our website. Available service options depend on the country in which service is requested. SpareOne service may be restricted to the original country of sale. Charges may apply. Full terms and detailed information about obtaining service are available at www.spareone.com/support

2) Visit our website and follow us on social media

User guide, pictures, questions, how-to videos, FAQ, contact information
www.spareone.com
All the latest events and news are waiting for you!
Facebook: [*@SpareOnePhone*]
Twitter: [*@SpareOnePhone*]

3) Where can I use my SpareOne?

Two different versions of the SpareOne are available. Scan QR code to view. Visit [www.spareone.com/gsm] for more information.



COMPLIANCE STATEMENT

SpareOne™ is a trademark of TennRich International Corp. © 2014 TennRich International Corp. Energizer and other marks are trademarks of Energizer.

FCC Warning

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Specific Absorption Rate (SAR):

SpareOne has also been tested against this SAR limit. The highest SAR value reported under this standard during product certification for use at the head is 0.373W/kg. (The SAR limit of USA (FCC) is 1.6W/kg averaged over one gram of tissue.) The use of belt clips, holders and similar accessories should not contain metallic components in their assembly. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

