

## Description

### General

The transceiver is small form factor pluggable module with standard duplex connector for fiber communications. This module is designed for multi-mode-fiber (MMF) and operates at a nominal wavelength of 1310 nm with cost effective and high performance. It is with the SFP 20-pin connector to allow hot plug capability.

### Transmitter Section

The transmitter consists of a high-performance 1310 nm Fabry-Perot (FP) laser in the optical subassembly (OSA), which is housed within a metal package. In addition, this component is also class 1 laser compliant with according to International Safety Standard IEC-825 Compliant. Complies with EN60825-1 and FDA 21 CFR 1040.10 and 1040.11

### Receiver Section

The receiver contain of an InGaAs PIN photodiode coupled to a high sensitivity transimpedance amplifier (TIA) in an OSA. This OSA combination is mated to a post amplifier IC that provides the post amplification and SD (Signal Detection) or LOS (Loss of Signal) indication circuit, which provides logic high state output when an unusable input optical signal level is detected.



## Features

- Single + 3.3V power supply
- Differential Inputs and Outputs
- Small Form Factor Pluggable MSA Compliant.
- Compliant with SFF-8472 MSA Digital Diagnostic Monitor (DDM), Internal Calibration.
- Class 1 Laser International Safety Standard IEC 825 Compliant. Complies with EN60825-1 and FDA 21 CFR 1040.10 and 1040.11
- Commercial Operation Temp.: -40 °C to +85 °C
- RoHS Compliant

## Applications

- Bridges/Routers/intelligent hub and concentrators
- Gigabit Ethernet / Fiber Channel
- Storage Area Network



## Performance Specifications

| Absolute Maximum Ratings                |                     |      |      |        |         |
|---|---------------------|------|------|--------|---------|
| Parameter                               | Symbol              | Min  | Typ  | Max    | Unit    |
| Supply Voltage                          | V <sub>CC</sub>     | 0    | -    | 4      | V       |
| Storage Temperature                     | T <sub>s</sub>      | -40  | -    | 85     | °C      |
| Operating Temperature                   | T <sub>OP-ind</sub> | -40  | -    | 85     | °C      |
| Lead Soldering Limits                   | T <sub>SOLD</sub>   | -    | -    | 260/10 | °C /sec |
| General Specifications                  |                     |      |      |        |         |
| Parameter                               | Symbol              | Min  | Typ  | Max    | Units   |
| Data Rate                               | B                   | 0.80 | 1.25 | 1.50   | Gbps    |
| Supported Link Length on 62.5/125 m MMF | L                   | 2    | -    | -      | Km      |
| Supply Current                          | I <sub>Tx+Rx</sub>  | -    | -    | 300    | mA      |
| Power Dissipation                       | P <sub>Dis</sub>    | -    | -    | 1000   | mW      |

## Optical and Electrical Characteristics

| <b>Transmitter Electrical Characteristics</b> |                       |            |            |            |             |
|---|-----------------------|------------|------------|------------|-------------|
| <b>Parameter</b>                              | <b>Symbol</b>         | <b>Min</b> | <b>Typ</b> | <b>Max</b> | <b>Unit</b> |
| Supply Voltage                                | $V_{CC}$              | 3.15       | 3.3        | 3.45       | V           |
| Data Differential Input Voltage               | $V_{in, pp}$          | 400        | -          | 2000       | mV          |
| Disable Input Voltage                         | $V_{IL} - V_{CC}$     | -1.81      | -          | -1.48      | V           |
| Enable Input Voltage                          | $V_{IH} - V_{CC}$     | -1.16      | -          | -0.88      | V           |
| TX Fault Voltage-High (Fault)                 | $V_{TF}$              | 2.0        | -          | $V_{CC}$   | V           |
| TX Fault Voltage-Low (Normal)                 | $V_{TN}$              | 0          | -          | 0.8        | V           |
| P <sub>Out</sub> @TX Disable Asserted         | $P_{OFF}$             | -          | -          | -45        | dBm         |
| <b>Transmitter Optical Characteristics</b>    |                       |            |            |            |             |
| <b>Parameter</b>                              | <b>Symbol</b>         | <b>Min</b> | <b>Typ</b> | <b>Max</b> | <b>Unit</b> |
| Output Optical Power on 9 $\mu$ m SMF         | $P_O$                 | -15        | -          | -5         | dBm         |
| Center Wavelength                             | $\lambda_C$           | 1280       | 1310       | 1340       | nm          |
| Spectral Width (RMS)                          | $\Delta\lambda_{RMS}$ | -          | -          | 2          | nm          |
| Optical Rise Time (20%-80%)                   | $t_r$                 | -          | -          | 0.26       | ns          |
| Optical Fall Time (20%-80%)                   | $t_f$                 | -          | -          | 0.26       | ns          |
| Extinction Ratio                              | ER                    | 9          | -          | -          | dB          |
| <b>Receiver Electrical Characteristics</b>    |                       |            |            |            |             |
| <b>Parameter</b>                              | <b>Symbol</b>         | <b>Min</b> | <b>Typ</b> | <b>Max</b> | <b>Unit</b> |
| Supply Voltage                                | $V_{CC}$              | 3.15       | 3.3        | 3.45       | V           |
| Data Differential Output Voltage              | $V_{out, pp}$         | 500        | -          | 1200       | mV          |
| Receiver LOS/SD Output Voltage-High           | $V_{RH}$              | 2.0        | -          | $V_{CC}$   | V           |
| Receiver LOS/SD Output Voltage-Low            | $V_{RL}$              | 0          | -          | 0.8        | V           |
| Data Output Rise Time (20%-80%)               | $t_r$                 | -          | -          | 0.35       | ns          |
| Data Output Fall Time (20%-80%)               | $t_f$                 | -          | -          | 0.35       | ns          |
| <b>Receiver Optical Characteristics</b>       |                       |            |            |            |             |
| <b>Parameter</b>                              | <b>Symbol</b>         | <b>Min</b> | <b>Typ</b> | <b>Max</b> | <b>Unit</b> |
| Maximum Receiver Power                        | $P_{in}$              | -3         | -          | -          | dBm         |
| Receiver Sensitivity                          | $P_S$                 | -          | -          | -20        | dBm         |
| Operating Wavelength                          | $\lambda_C$           | 1100       | -          | 1600       | nm          |
| Optical Return Loss                           | $P_R$                 | -          | -          | 12         | dB          |
| Signal Detect-Asserted                        | $P_A$                 | -          | -          | -20        | dBm avg.    |
| Signal Detect-Deasserted                      | $P_D$                 | -36        | -          | -          | dBm avg.    |
| Signal Detect-Hysteresis                      | $P_A - P_D$           | 0.5        | -          | -          | dB          |

### SFP Transceiver Electrical Pad Layout

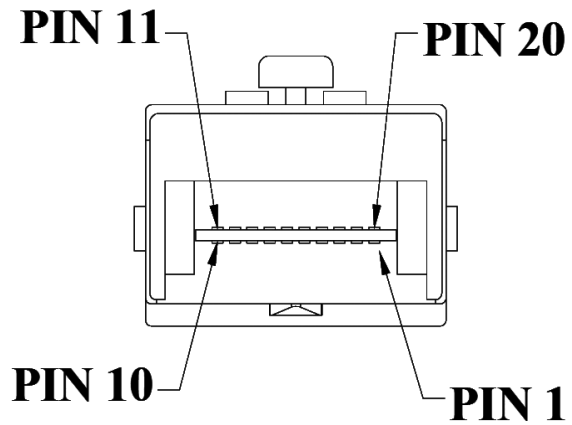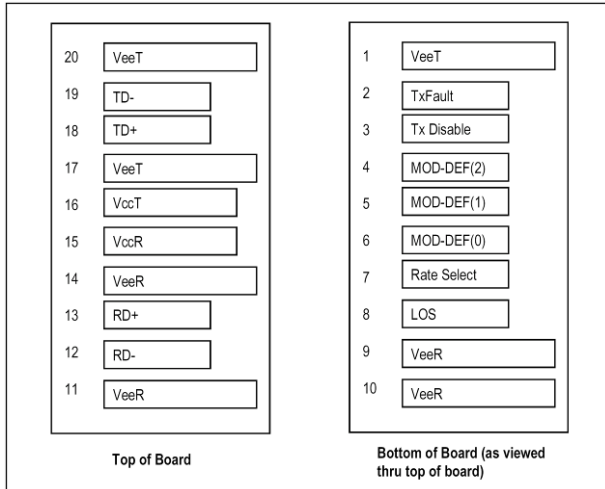

### Pinout Table

| Pin | Symbol             | Name/Description  | Ref. |
|-----|--------------------|---|------|
| 1   | VEET               |   |      |
| 2   | T <sub>FAULT</sub> | Transmitter Fault.  | 3    |
| 3   | T <sub>DIS</sub>   | Transmitter Disable. Laser output disabled on high or open.                                       | 1    |
| 4   | MOD_DEF (2)        | Module Definition 2. Data line (SDA) for Serial ID.   | 2    |
| 5   | MOD_DEF (1)        | Module Definition 1. Clock line (SCL) for Serial ID.  | 2    |
| 6   | MOD_DEF (0)        | Module Definition 0. Grounded within the module.  | 2    |
| 7   | Rate Select        | Open Circuit  |      |
| 8   | LOS                | Loss of Signal indication. Logic 0 indicates normal operation.                                    | 3    |
| 9   | VEER               | Receiver Ground   |      |
| 10  | VEER               | Receiver Ground   |      |
| 11  | VEER               | Receiver Ground   |      |
| 12  | RD-                | Receiver Inverted DATA out. AC Coupled  |      |
| 13  | RD+                | Receiver Non-inverted DATA out. AC Coupled  |      |
| 14  | VEER               | Receiver Ground   |      |
| 15  | V <sub>CCR</sub>   | Receiver Power Supply   |      |
| 16  | V <sub>CCT</sub>   | Transmitter Power Supply  |      |
| 17  | VEET               | Transmitter Ground  |      |
| 18  | TD+                | Transmitter Non-Inverted DATA in. 100 ohm termination between TD+ and TD-, AC Coupled thereafter. |      |
| 19  | TD-                | Transmitter Inverted DATA in. See TD+   |      |
| 20  | VEET               | Transmitter Ground  |      |

**Notes:**

1. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
2. Should be pulled up with 4.7k – 10kohms on host board to a voltage between 2.0V and 5.5V. MOD\_DEF (0) pulls line low to indicate module is plugged in.
3. TX-Fault and LOS are open collector output. Should be pulled up with 4.7k – 10k ohms on host board to a voltage between 2.0V and 5.5V.

