

IGS-1080A



IGS-1080A

➤ **Industrial 8-port slim type unmanaged Gigabit Ethernet switch with 8x10/100/1000Base-T(X)**

Features

- Supports auto-negotiation and auto-MDI/MDI-X
- Supports Jumbo Frame up to 9K Bytes
- Relay output for carrying capacity of 1A at 24 VDC
- Supports store-and-forward transmission
- Supports flow control
- Hardware DIP switch for enabling/disabling the warning function
- Rigid IP-30 housing design
- DIN-Rail and wall mounting enabled




Introduction

IGS-1080A is the slim type unmanaged gigabit Ethernet switch with 8 x 10/100/1000Base-T(X) ports. IGS-1080A supports redundant power input, rigid IP-30 housing, plus DIP switches for enabling or disabling relay output alarm. In addition, the wide operating temperature range from -40°C to 70°C can satisfy most of operating environments.

Practical Operation

IGS-1080A can be used in connecting several Ethernet devices such as Ethernet I/O, IP-Camera or other Ethernet switches. In addition, there are two different power inputs at terminal block to avoid interruption caused by power down. When the primary DC power input fails, the backup power input will take over immediately to guarantee a non-stop operation.

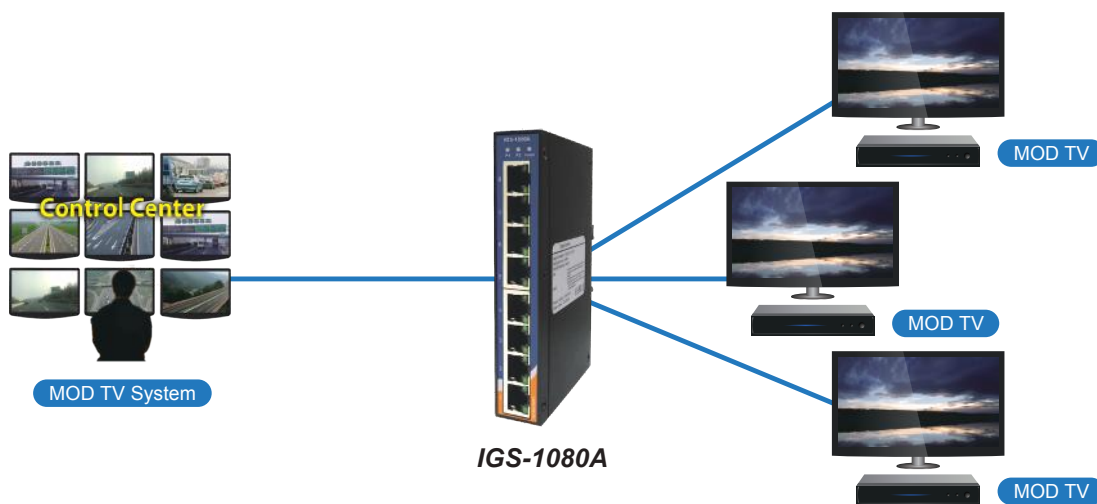

Connections of Ethernet devices

Industrial Ethernet Switch

Industrial Media Converter

Industrial Device Server

Industrial Wireless Access Point


Industrial Cellular VPN Router

Industrial M2M Gateway

Accessories

Network Management Software

Dimensions

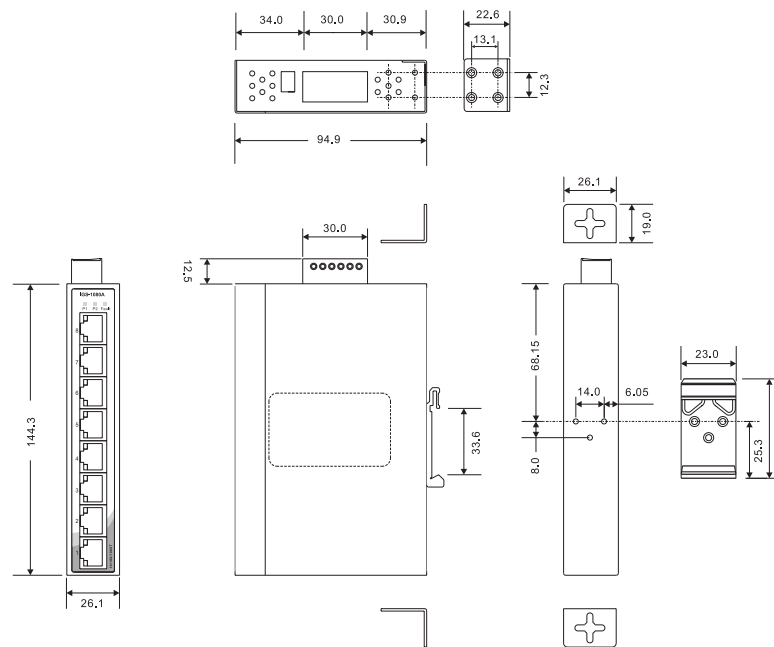

(Unit=mm)

Specifications

ORing Switch Model	IGS-1080A
Physical Ports	
10/100/1000Base-T(X) Ports in RJ45 Auto MDI/MDIX	8
Technology	
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow control
MAC Table	4096 MAC addresses
Processing	Store-and-Forward
LED Indicators	
Power Indicator	Green : Power LED x 2
Fault Indicator	Amber : Indicates PWR1 or PWR2 failure
10/100/1000Base-T(X) RJ45 Port Indicator	Green for port Link / Act Amber for 100Mbps indicator
DIP Switch	
DIP-Switch 1	Power-1 failed warning : (ON) enable, (OFF) disable
DIP-Switch 2	Power-2 failed warning : (ON) enable, (OFF) disable
Fault contact	
Relay	Relay output to carry capacity of 1A at 24VDC
Power	
Redundant Input Power	Dual DC inputs. 12~48 VDC on 6-pin terminal block.
Power Consumption (Typ.)	5.5 Watts
Overload Current Protection	Present
Reverse Polarity Protection	Present

Physical Characteristics	
Enclosure	IP-30
Dimensions (W x D x H)	26.1(W) x 94.9(D) x 144.3(H) mm (1.03x3.74x5.68 inch.)
Weight (g)	375g
Environmental	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 70°C (-40 to 158°F)
Operating Humidity	5% to 95% Non-condensing
Regulatory Approvals	
EMC	CE EMC (EN55024,EN 55032), FCC Part 15 B
EMI	EN55032, CISPR 32, EN61000-3-2, EN61000-3-3, FCC Part 15 B class A
EMS	EN55024 (IEC/EN 61000-4-2 (ESD), IEC/EN 61000-4-3 (RS), IEC/EN 61000-4-4 (EFT), IEC/EN61000-4-5 (Surge), IEC/EN 61000-4-6 (CS), IEC/EN 61000-4-8 (PFMF), IEC/EN 61000-4-11 (DIP))
Shock	IEC60068-2-27
Free Fall	IEC60068-2-31
Vibration	IEC60068-2-6
Safety	EN60950-1 compliant
MTBF	875918.4026 hrs
Warranty	5 years

Ordering Information

IGS-1 **AA** **B** **A**

Code Definition	10/100/1000Base-T(X) Port Number	Additional Port Number
Option	- 08 : 8 ports	- 0 : 0 ports

Available Model	Model Name	Description
	IGS-1080A	Industrial 8-port slim type unmanaged Gigabit Ethernet switch with 8 x 10/100/1000Base-T(X)
Packing List		Optional Accessories (Can be purchased separately)
<ul style="list-style-type: none"> IGS-1080A x 1 Quick Installation Guide x 1 Din-Rail Kit x 1 Wall-Mount Kit x 1 		<ul style="list-style-type: none"> DR-45 series : 45 Watts DIN-Rail power supply DR-120 series : 120 Watts DIN-Rail power supply DR-75 series : 75 Watts DIN-Rail power supply

- Industrial Ethernet Switch
- Industrial Media Converter
- Industrial Device Server
- Industrial Wireless Access Point
- Industrial Cellular VPN Router
- Industrial M2M Gateway
- Accessories
- Network Management Software