

Managed EX approved Device Server Switch with Routing Functionality

L206-S2-EX



- ⌘ Global approval for hazardous area use
 - IECEx, International EX standard
 - Atex 94/9/EC, EU directive
 - Class 1 Div 2, approval for US and Canada
- ⌘ Compact Industrial Ethernet switch design
 - Flexible SFP transceiver design
 - Advanced WeOS Layer 3 functionality
 - Low power consumption
- ⌘ Robust for long service life
 - 593,000 hours MTBF to MIL-HDBK-217K
 - -40 to +70°C (-40 to +158°F) with no moving parts
 - Industrial EMC, shock and vibration testing
- ⌘ Unique future proof industrial networking solutions
 - 20 ms network ring recovery time
 - Fast reconnect for multicast protocols
 - Easy to use

EN 50121-4 Railway Trackside
 EN 55022 ITE Emission
 EN 61000-6-1 Residential Immunity
 EN 61000-6-2 Industrial Immunity
 EN 61000-6-4 Industrial Emission
 IEC 60079-0 Explosive atmospheres
 IEC 60079-15 Explosive atmospheres
 IEC 60079-28 Explosive atmospheres

Lynx 206 EX is a layer 3 managed industrial Ethernet switch, powered by the Westermo WeOS network operating. Independently tested for IECEx and ATEX by Baseefa, as well as Class 1 Division II by FM approval, Lynx is the perfect solution for hazardous area applications in any part of the world.

Lynx is the most compact and has the lowest power requirements in this class of switch. Lynx has 4 10/100 Mbit/s ports in addition to 2 serial ports. One serial port is configured for RS-232, the other one can be configured for either RS-232 or RS-422/485.



Only industrial grade components are used which gives Lynx an MTBF of 593,000 hours and ensures a long service life. A wide operating temperature range -40 to +70°C (-40 to +158°F) can be achieved with no moving parts or cooling holes in the case. Lynx has been tested both by Westermo and external test houses to meet many EMC, isolation, vibration and shock standards, all to the highest levels suitable for heavy industrial environments and rail trackside application.

WeOS has been developed by Westermo to allow us to offer cross platform and future proof solutions. WeOS can deliver 20 ms ring recovery performance even for networks with video or EtherNet/IP traffic. For EX approved transceivers and more WeOS functionality please see the transceiver and WeOS datasheets.

Ordering Information	
Art.no	Description
3643-5225	L206-S2-EX, Managed EX approved Device Server Switch with Routing Functionality
1211-2027	CLI Cable (Console) (Accessories)
1211-2210	RJ-45 to DB9 cable (Accessories)

Specifications L206-S2-EX

Dimensional drawing

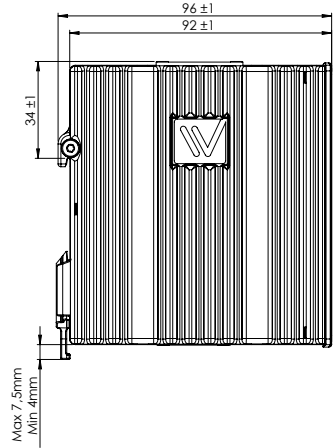

Dimension W x H x D 52 x 100 x 101 mm
(2.04 x 3.93 x 3.97 in)

Weight 0.7 kg

Degree of protection IP 40

Power

Operating voltage	19 to 60 VDC
Rated current	150 mA (300 mA) @ 24VDC (with 500 mA USB load) 80 mA (150 mA) @ 48VDC (with 500 mA USB load)

Interfaces

Ethernet TX	4 x RJ-45, 10 Mbit/s, 100 Mbit/s,
2 Serial ports (One configurable for RS-232 or RS-422/485)	1 x RJ-45, RS-232: 50 bit/s – 115.2 kbit/s
	1 x RJ-45, RS-422/485: 50 bit/s – 2 Mbit/s
Digital I/O	1 x 4-position detachable screw terminal
USB	1 x USB 2.0 host interface
Console	1 x 2.5 mm jack, use only Westermo cable 1211-2027

Temperature

Operating	-40 to +70°C (-40 to +158°F)
Storage & Transport	-50 to +85°C (-58 to +185°F)

Agency approvals and standards compliance

EMC	EN 61000-6-1, Immunity residential environments
	EN 61000-6-2, Immunity industrial environments
	EN 61000-6-4, Emission industrial environments
	EN 55022 +A1, Emission IT equipment
	EN 55024, Immunity IT equipment
	FCC part 15 Class A
	EN 50121-4, Railway signalling and telecommunications apparatus
	IEC 62236-4, Railway signalling and telecommunications apparatus
Safety	UL/IEC/EN 60950-1, IT equipment
Marine	DNV Standard for Certification no. 2.4
IECEx	Explosive atmosphere
	IEC 60079-0, General requirements
	IEC 60079-15, Equipment protected by type of protection "n"
ATEX	Explosive atmosphere
	EN 60079-0, General requirements
	EN 60079-15, Equipment protected by type of protection "n"
Class1 Div 2	FM Approval