

[Support](#)[Connect](#)

Routers, broadband

[View](#)

Cameras, NVRs

[Share](#)

Network storage

[Entertain](#)

Media players


[Work](#)

Mobile broadband

[Home Solutions](#) > [Support](#) > [FAQs](#) > [Routers](#) > [Cloud](#) > How do I setup and Install my DIR-605L?[Support](#)[FAQs](#)[Product Registration](#)[Premium Services](#)[Intelligent Chat](#)[Contact Support](#)

How do I setup and Install my DIR-605L?

Step 1: Unplug the **Power** to your Cable/DSL Internet Modem

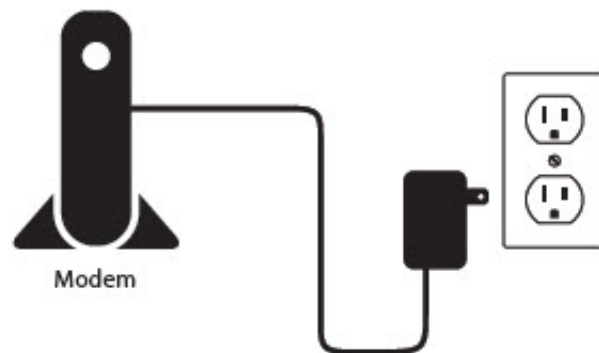

Step 2: Connect an Ethernet cable from your computer/laptop to a **LAN** port (Port 1,2,3 or 4) on the DIR-605L

FAQ Categories

< Routers

Cloud


Mobile Routers



Wired Routers




Wireless Routers

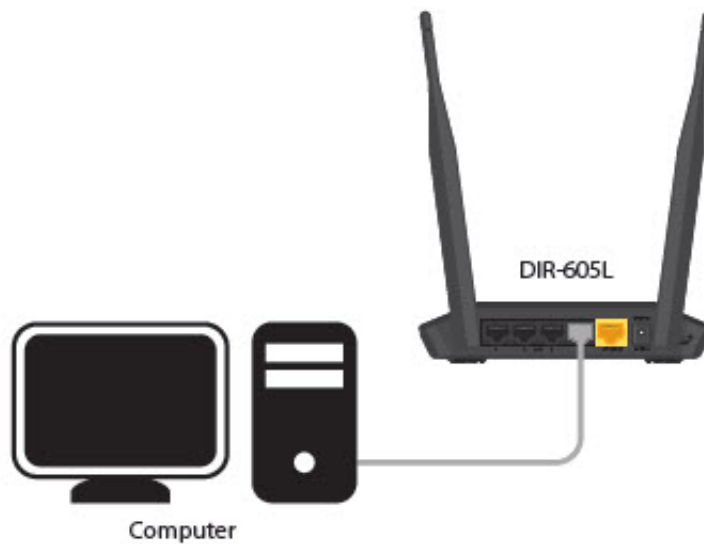

Step 3: Connect your Cable/DSL modem to the **Yellow Internet Port** on the DIR-605L



Step 4: Power on both the DIR-605L and your Internet Cable/DSL Modem

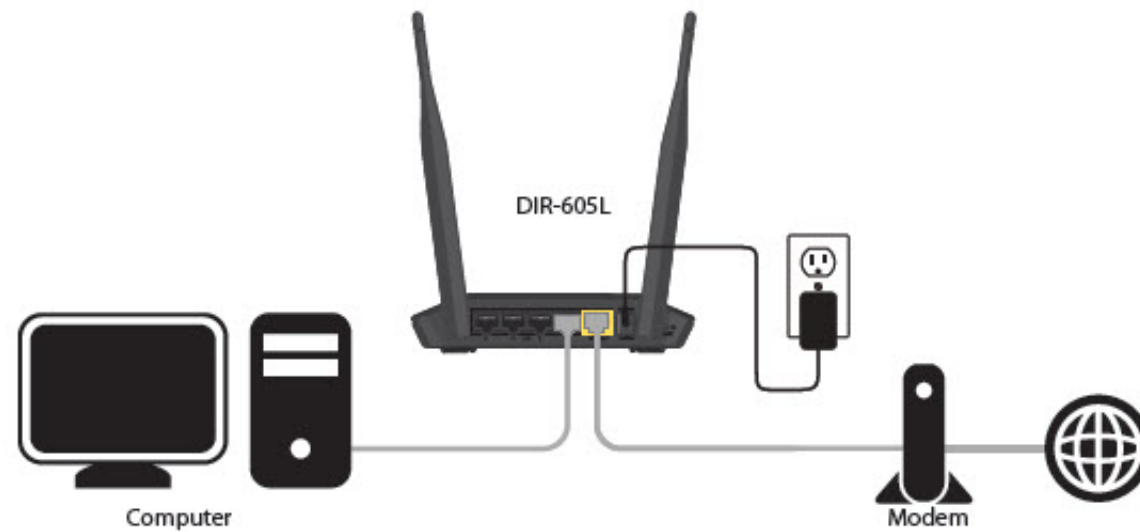


Step 5: Open your Internet browser (Internet Explorer/Firefox) and enter <http://192.168.0.1> into the address bar (In some cases, you may get automatically directed here)




Step 6: The Setup Wizard should appear

- Select your preferred Language and click Start

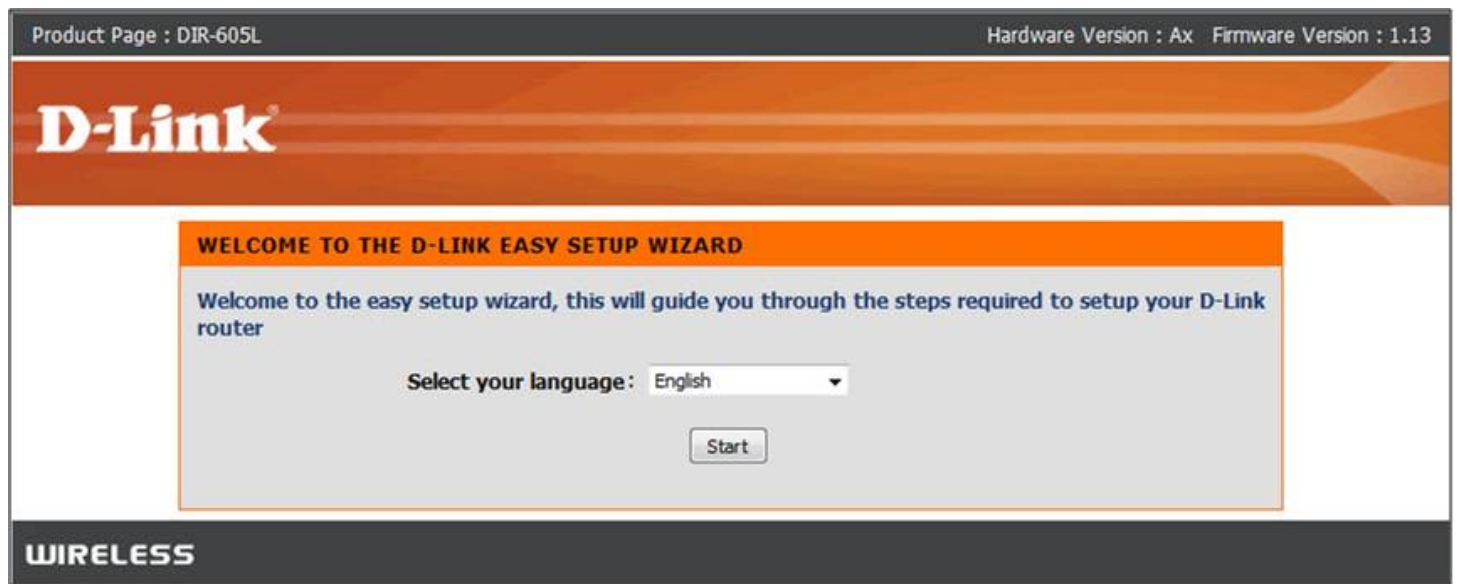

- Select Manual Configuration

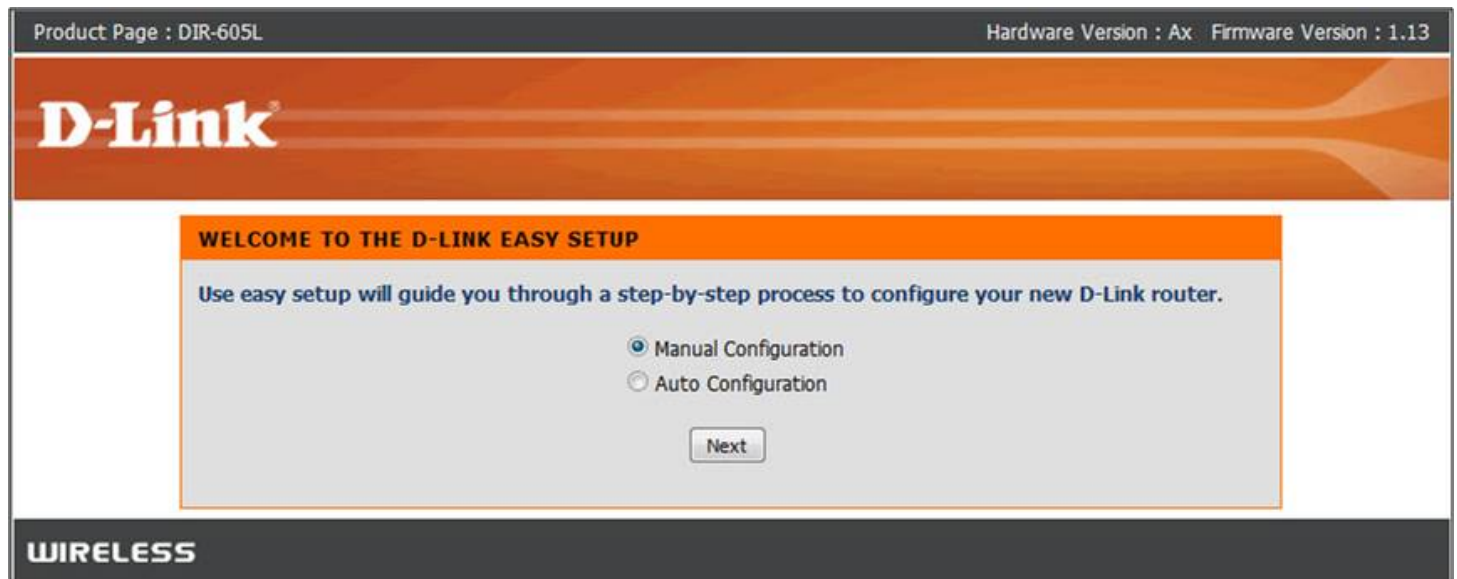

- Select your Internet Connection type: **Dynamic** or **PPPoE**
 - Dynamic IP (DHCP) - Cable Internet Service (Rogers, Shaw, Cogeco, Videotron, Teksavvy)
- Setup a Wireless Network Name and Password

- **D-Link Suggests Securing your wireless network with WPA/WPA encryption**

Product Page : DIR-605L Hardware Version : Ax Firmware Version : 1.13

D-Link

STEP 1: CONFIGURE YOUR INTERNET CONNECTION

Internet Connection

Internet Connection: Dynamic IP (DHCP) ▾

Wireless Settings

Network Name (SSID) My Home Network

Security Mode Disable Wireless Security (Not recommended)
 AUTO-WPA/WPA2(Recommended)

Network Key Password

Auto generate network key

Prev Next

WIRELESS

- PPPoE - DSL Internet Service (Bell Sympatico, Teksavvy DSL, Sasktel, Acanac)
 - Username: Your Internet username (Provided by your Internet Service Provider)
 - Password: Your Internet Password (Provided by your Internet Service Provider)
- Setup a Wireless Network Name and Password
 - **D-Link Suggests Securing your wireless network with WPA/WPA encryption**

D-Link**STEP 1: CONFIGURE YOUR INTERNET CONNECTION****Internet Connection**

Internet Connection : PPPoE

User Name : username@isp.com

Password :

Confirm Password :

Wireless Settings

Network Name (SSID) : My Home Network

Security Mode Disable Wireless Security (Not recommended) AUTO-WPA/WPA2(Recommended)

Network Key : Password

 Auto generate network key

Prev

Next

WIRELESS

- Enter an administrator password for the router (**Note:** This is not the wireless password- This is the password for logging into the router configuration)

D-Link

STEP 2: SET YOUR PASSWORD

By default, your new D-Link Router does not have a password configured for administrator access to the Web-based configuration pages. To secure your new networking device, please set and verify a password below

Password :

Confirm Password :

WIRELESS

- Select your Time Zone

D-Link

STEP 3: SELECT YOUR TIME ZONE

Select the appropriate time zone for your location. This information is required to configure the time-based options for the router.

Time Zone :

WIRELESS

- The router will apply the new settings and reboot. You should be prompted with the routers Login Screen
 - Enter the username: admin and your created password (created earlier)

Product Page : DIR-605L Hardware Version : Ax Firmware Version : 1.13

D-Link

Login

Login to the router :

User Name : admin

Password : ●●●●●●

Login

WIRELESS

- Your current Network settings are display. Everything but your mydlink setting should be configured
 - Click on the **Configure** button under the **mydlink Account settings**

D-Link

CURRENT NETWORK SETTING

The current network settings and the connection status are displayed below. If you want to reconfigure your wireless settings, please click the "Configure" button. You can also enter advanced settings by clicking "Manual Setup".

Internet Settings

Internet Connection : Dynamic IP (DHCP)

Status : **Connected**

Wireless Settings

Network Name (SSID) : My Home Network

Status : **Encryption**

Security : Auto (WPA or WPA2) - Personal

Network Key : password

Device Info

User Name : admin

Password : password

mydlink Account

You have not activated mydlink service.

Status : **Not Connected**

WIRELESS

- Create a new account or if you already have an existing mydlink account, enter your login details.

D-Link**CONFIGURE YOUR MYDLINK ACCOUNT**

Do you have mylink account?

- Yes, I have a mylink account.
 No, I want to register and login with a new mylink account.

E-mail Address (Account Name): myaccount@dlink.com

Password: ●●●●●●

Login

Back

WIRELESS

- Your DIR-605 is now configured.

D-Link

CURRENT NETWORK SETTING

The current network settings and the connection status are displayed below. If you want to reconfigure your wireless settings, please click the "Configure" button. You can also enter advanced settings by clicking "Manual Setup".

Internet Settings

Internet Connection : Dynamic IP (DHCP)

Status : **Connected**

Wireless Settings

Network Name (SSID) : My Home Network

Status : **Encryption**

Security : Auto (WPA or WPA2) - Personal

Network Key : password

Device Info

User Name : admin

Password : password

mydlink Account

You have activated mydlink service.

Status : **Connected**

WIRELESS

- To view your DIR-605L through the mydlink portal. Visit <http://mydlink.com> and log into your account.
- Your DIR-605L should now be visible.

My Devices**My Profile**

- 31316500
- 31300085
- 31300066
- 30936540
- DIR-836L
21765021
- 20987764
- DIR-605L
20058996

Router Status**Settings**

0003.5 kbps
0003.5 kbps

Model Name DIR-605L [Reboot](#)
Network Name(SSID) (2.4 GHz)
Internet IP 192.168.145.67
LAN IP 192.168.0.1
Connected Devices 0 device(s)

Connection List

Device	Device Name	IP Address	MAC Address	Block
--------	-------------	------------	-------------	-------

Suspect List

Device	Device Name	Time	MAC Address	Block
--------	-------------	------	-------------	-------

News

2013/01/24 12:00
Firefox no longer supports Java Runti...

**Top 5 FAQs**

- How do I update my device's firmware manually?
- Which device does the mydlink website support?
- How do I install the mydlink lite app on my Android device?
- Which web browsers can I use with mydlink?
- How do I sign up for a mydlink account?

[GO](#)[Back to FAQs](#)

Did you find this useful?

[Yes](#)[No](#)

Quick Links

Quickly access parts of the D-Link site.

Support

- [Support](#)
- [FAQs](#)
- [Learning Center](#)
- [Product Registration](#)
- [Intelligent Chat](#)
- [Contact Support](#)

About D-Link

- [About D-Link](#)
- [History of D-Link](#)
- [Corporate Milestones and Achievements](#)
- [Investor Relations](#)
- [Partners](#)
- [News and Blog](#)
- [Events](#)
- [Careers](#)
- [Awards and Reviews](#)
- [Press](#)
- [Contact Us](#)
- [Technology](#)
- [Privacy](#)

D-Link Campaigns

- [mydlink™](#)
- [Gaming Router](#)
- [11AC Wi-Fi](#)
- [Mobile Apps](#)
- [Cloud](#)

Products

- [Accessories](#)
- [Network Adapters](#)
- [Access Points, Range Extenders & Bridges](#)
- [PowerLine](#)
- [Routers](#)
- [Switches](#)
- [Network Cameras](#)
- [Network Video Recorders \(NVRs\)](#)
- [Network Attached Storage](#)
- [Wireless Mobile Broadband](#)
- [Modems and Gateways](#)
- [Print Servers](#)
- [USB](#)
- [MoCA](#)

Where To Buy

- [Find a retailer](#)
- [D-Link Shop](#)

The D-Link Newsletter

We won't share your details. Have a look at our [privacy information](#)

D-Link around the web

