

D-Link[®]

Quick Installation Guide

Warning: Please follow the instructions in this guide carefully. Connecting these adapters incorrectly may result in damage to you network devices.



DWL-P200
Power Over
Ethernet Adapters

About Power Over Ethernet.

The DWL-P200 Power Over Ethernet (POE) Adapters are designed to supply operational power to a Network Device. These adapters eliminate the need to use an additional AC/DC power supply at the Network Device giving you the ability to mount a Network Device virtually anywhere in a building where power outlets are not available, (for example in, ceilings, attics). D-Link's DWL-P200 Adapters take advantage of the unused cable pairs within Ethernet Cat 5 cabling. The Base Unit inserts DC voltage into the unused wires therefore allowing the single Category 5 cable to carry both Ethernet data and DC power to an Network Device. The POE Terminal Unit splits the data and DC power apart, which is then supplied to the Network Device.

Check Your Package Contents



DWL-P200 Base Unit and Terminal Unit




Ethernet (CAT5 UTP/Straight Through) Cable



Female-to-Female Power Connector



48V DC Power Adapter

 Using a power supply with a different voltage rating will damage and void the warranty of this product.

If any of the above items are missing, please contact your reseller.

©2012 D-Link Company. All rights reserved. Trademarks or registered trademarks are the property of their respective holders. Software and specifications subject to change without notice.

1

Connecting The DWL-P200

Base Unit

P+DATA OUT:

provides the data and power to the terminal unit. Connect this port to the P+DATA IN on the Terminal unit.



LAN IN: connect an RJ-45 straight-through cable to your computer or switch.

Power In: using the supplied 48V power supply, connect to a wall power outlet.

Terminal Unit

LAN OUT: connect a CAT 5 RJ-45 straight-through cable to an Ethernet enabled device.

DC Out: supplies 5V 2.5 or 12V 1 amps of power. Using the included power cable, connect to your Ethernet enabled device's power.



Voltage Selector: used to select DC 5V/2.5A or 12V/1A

P+DATA IN: connect a CAT 5 RJ-45 straight-through cable from the P + Data Out port on the Base Unit.



1

Connecting The DWL-P200



Always pair a Base unit with a Terminal unit. **DO NOT** connect two Base units together, or two Terminal units together.

Insert one end of a Cat 5 Ethernet RJ-45 cable into the “LAN IN” port of the Base Unit. Connect the other end of the cable to your network switch or PC.



Do Not mistake the “LAN IN” port with the “P + DATA OUT” port. Incorrectly plugging the wrong Ethernet cable into the wrong Ethernet port may cause serious damage to your network devices. **D-Link** will not replace or repair products or reimburse customers for devices that become damaged due to incorrect installation, nor is liable for any loss of business resulting in the incorrect installation of this product.

Plug one end of the Power Adapter into the “DC 48V IN” Base Unit and the other end into your electrical outlet. The green “PWR” LED on the Base Unit should light up.




1

Connecting The DWL-P200

Connect another Cat 5 Ethernet cable from the Base Unit “P+DATA OUT” to the “P+DATA IN” of the Terminal Unit.

Use Voltage Selector to set DC output to 5V/2.5A or 12V/1A as required by the Network Device.

 Only use a CAT 5 Ethernet straight-through cable.



Insert one end of the DC Power Cable that is provided into the Terminal Unit, and the other end into the DC of the Network Device. The Power LED of the Terminal Unit should light up.




1 Connecting The DWL-P200

Connect the provided Cat 5 Ethernet cable from the Terminal Unit "LAN OUT" to the RJ-45 LAN port of the Network Device.



At this point, your Network Device should have power and data, and function normally.

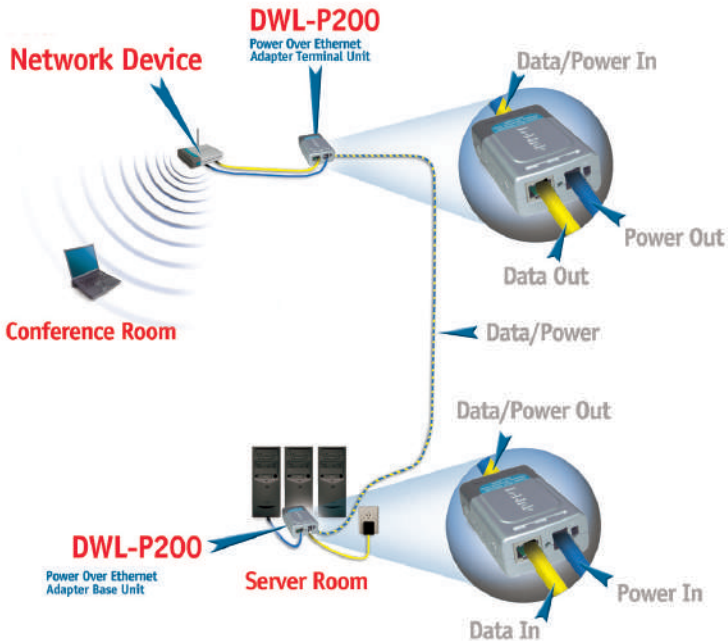

Features

- Provides DC power over existing CAT 5 cabling to Access Points.
- Transforms incoming AC power into low-voltage DC power.
- Base and Terminal Power Over Ethernet modules powers any Network Device requiring 5V or 12V DC input.
- Protects Access Points from possible damages due to power-surges.
- Output: 5VDC, 2.5A or 12VDC, 1A

Specifications

Category 5 Pin Usage

- Data: 1, 2, 3, 6
- Power: 4, 5, 7, 8

Voltage

- Input: 48VDC, 500mA
- Output: 5VDC, 2.5A or 12VDC, 1A

Ethernet

- Connector: RJ-45
- Data Rate: 10/100Mbps
- Cable: TIA/EIA - 568, Category 5

Dimensions

- Base Unit: 8.09 x 5.2 x 2.8cm
- Terminal Unit: 8.09 x 5.2 x 2.8cm

Weight

- Base + Terminal Unit: 4.1oz

Temperature


- Operating: 0°C to 40°C (32°F to 104°F)
- Storage: -40°C to 70°C (-40°F to 158°F)

Operating Humidity

- 10% to 80%

Warranty

- 1 Year

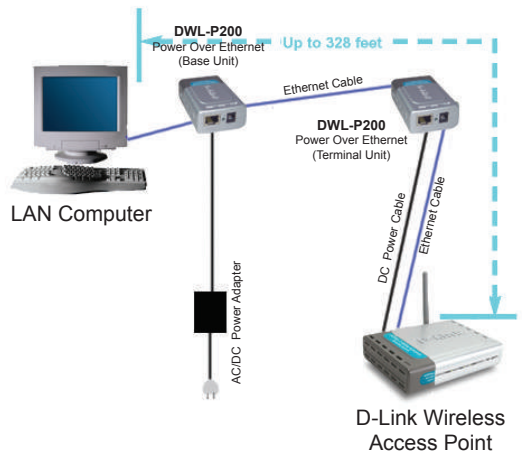

You can find software updates and user documentation on the D-Link website.

Tech Support for customers in

Australia:

Tel: 1300-766-868
 24/7 Technical Support
 Web: <http://www.dlink.com.au>
 E-mail: support@dlink.com.au

India:

Tel: +91-22-27626600
 Toll Free 1800-22-8998
 Web: www.dlink.co.in
 E-Mail: helpdesk@dlink.co.in

Singapore, Thailand, Indonesia, Malaysia, Philippines, Vietnam:

Singapore - www.dlink.com.sg
 Thailand - www.dlink.co.th
 Indonesia - www.dlink.co.id
 Malaysia - www.dlink.com.my
 Philippines - www.dlink.com.ph
 Vietnam - www.dlink.com.vn

Korea:

Tel : +82-2-2028-1810
 Monday to Friday 9:00am to 6:00pm
 Web : <http://d-link.co.kr>
 E-mail : g2b@d-link.co.kr

New Zealand:

Tel: 0800-900-900
 24/7 Technical Support
 Web: <http://www.dlink.co.nz>
 E-mail: support@dlink.co.nz

South Africa and Sub Sahara Region:

Tel: +27 12 661 2025
 08600 DLINK (for South Africa only)
 Monday to Friday 8:30am to 9:00pm South Africa Time
 Web: <http://www.d-link.co.za>
 E-mail: support@d-link.co.za

Saudi Arabia (KSA):

Tel: +966 01 217 0008
 Fax: +966 01 217 0009
 Saturday to Wednesday 9.30AM to 6.30PM
 Thursdays 9.30AM to 2.00 PM
 E-mail: Support.sa@dlink-me.com

D-Link Middle East - Dubai, U.A.E.

Plot No. S31102,
 Jebel Ali Free Zone South,
 P.O.Box 18224, Dubai, U.A.E.
 Tel: +971-4-8809022
 Fax: +971-4-8809066 / 8809069
 Technical Support: +971-4-8809033
 General Inquiries: info.me@dlink-me.com
 Tech Support: support.me@dlink-me.com

Egypt

1, Makram Ebeid Street - City Lights Building
 Nasrcity - Cairo, Egypt
 Floor 6, office C2
 Tel.: +2 02 26718375 - +2 02 26717280
 Technical Support: +2 02 26738470
 General Inquiries: info.eg@dlink-me.com
 Tech Support: support.eg@dlink-me.com

Kingdom of Saudi Arabia

Office # 84 ,
 Al Khaleej Building (Mujamathu Al-Khaleej)
 Opp. King Fahd Road, Olaya
 Riyadh - Saudi Arabia
 Tel: +966 1 217 0008
 Technical Support:
 +966 1 2170009 / +966 2 6522951
 General Inquiries: info.sa@dlink-me.com
 Tech Support: support.sa@dlink-me.com

Pakistan

Islamabad Office:
 61-A, Jinnah Avenue, Blue Area,
 Suite # 11, EBC, Saudi Pak Tower,
 Islamabad - Pakistan
 Tel.: +92-51-2800397, 2800398
 Fax: +92-51-2800399

Karachi Office:

D-147/1, KDA Scheme # 1,
 Opposite Mudassar Park, Karsaz Road,
 Karachi – Pakistan
 Phone: +92-21-34548158, 34326649
 Fax: +92-21-4375727
 Technical Support: +92-21-34548310, 34305069
 General Inquiries: info.pk@dlink-me.com
 Tech Support: support.pk@dlink-me.com

Iran

Unit 5, 5th Floor, No. 20, 17th Alley , Bokharest
 St. , Argentine Sq. ,
 Tehran IRAN
 Postal Code : 1513833817
 Tel: +98-21-88880918,19
 +98-21-88706653,54
 General Inquiries: info.ir@dlink-me.com
 Tech Support: support.ir@dlink-me.com

Morocco

M.I.T.C
 Route de Nouaceur angle RS et CT 1029
 Bureau N° 312 ET 337
 Casablanca , Maroc
 Phone : +212 663 72 73 24
 Email: support.na@dlink-me.com

Lebanon RMA center

Dbayeh/Lebanon
 PO Box:901589
 Tel: +961 4 54 49 71 Ext:14
 Fax: +961 4 54 49 71 Ext:12
 Email: taoun@dlink-me.com

Bahrain

Technical Support: +973 1 3332904

Kuwait:

Technical Support: + 965 22453939 / +965
 22453949

Türkiye Merkez İrtibat Ofisi

Ayazağa Maslak yolu
 Erdebil Cevahir İş Merkezi No: 5/A Ayazağa /
 Maslak İstanbul
 Tel: +90 212 2895659
 Ücretsiz Müşteri Destek Hattı: 0 800 211 00 65
 Web:www.dlink.com.tr
 Teknik Destek: support.tr@dlink.com.tr

ISRAEL

מטלון סנטר
 רח' המגשימים 20
 קרית מטלון, פ"ת 49348
 ת.ד. 7060
 טלפון: 073-796-2797
 אי-מאייל כללי: info@dlink.co.il
 אי-מאייל תמיכה: support@dlink.co.il