EDS-P510A-8PoE Series

 8+2G-port Gigabit PoE+ managed Ethernet switches with 8 IEEE 802.3af/at PoE+ ports

> Built-in 8 PoE+ ports compliant with IEEE 802.3af/at standards > Up to 36 W output per PoE+ port > 3 kV LAN surge protection for extreme outdoor environments > PoE diagnostic for powered device mode analysis > 2 Gigabit combo ports for high-bandwidth and long-distance communication > Operates with 240 watts full PoE+ loading at -40 to 75°C > Supports MXstudio for easy, visualized industrial network management > V-ON™ ensures millisecond-level multicast data and video network recovery V-ON 6 c 🕕 us 🔆 EN 50121 CEF© Turbo SIII Chain Introduction

The Moxa EDS-P510A-8PoE Series are Gigabit managed PoE+ Ethernet switches that come standard with 8 10/100BaseT(X), 802.3af (PoE), and 802.3at (PoE+)-compliant Ethernet ports, and 2 combo Gigabit Ethernet ports. The EDS-P510A-8PoE Ethernet switches provide up to 30 watts of power per PoE+ port in standard mode and allow high power output of up to 36 watts for industrial heavy-duty PoE devices, such as weather-proof IP surveillance cameras with wipers/heaters, high-performance wireless access points, and rugged IP phones. The EDS-P510A-8PoE Ethernet switches are highly versatile, and the

Features and Benefits

- Advanced PoE management function (PoE output setting, PD failure check, PoE scheduling, and PoE diagnostic)
- Command Line Interface (CLI) for quickly configuring major managed functions
- IPv6 Ready logo awarded (IPv6 Logo Committee certified)
- Software-based IEEE 1588 PTPv2 (Precision Time Protocol) for precise time synchronization of networks
- DHCP Option 82 for IP address assignment with different policies
 Support EtherNet/IP and Modbus/TCP protocol for device
- Compatible with PROFINET protocol for transparent data
- transmission
- Turbo Ring and Turbo Chain (recovery time < 20 ms @ 250 switches), RSTP/STP, and MSTP for network redundancy

Specifications

Technology

Standards:

- IEEE 802.3af/at for Power-over-Ethernet
- IEEE 802.3 for 10BaseT
- IEEE 802.3u for 100BaseT(X) and 100BaseFX
- IEEE 802.3ab for 1000BaseT(X)
- IEEE 802.3z for 1000BaseX
- IEEE 802.3x for Flow Control
- IEEE 802.1D-2004 for Spanning Tree Protocol
- IEEE 802.1w for Rapid STP
- IEEE 802.1s for Multiple Spanning Tree Protocol
- IEEE 802.1Q for VLAN Tagging
- IEEE 802.1p for Class of Service
- IEEE 802.1X for Authentication IEEE 802.3ad for Port Trunk with LACP
- **Software Features**

Management: IPv4/IPv6, SNMP v1/v2c/v3, LLDP, Port Mirror, DDM, RMON, DHCP Server/Client, DHCP Option 66/67/82, BootP, TFTP,

SFP fiber ports can transmit data up to 120 km from the device to the control center with high EMI immunity. The Ethernet switches support a variety of management functions, including STP/RSTP, Turbo Ring, Turbo Chain, PoE power management, PoE device auto-checking, PoE power scheduling, PoE diagnostic, IGMP, VLAN, QoS, RMON, bandwidth management, and port mirroring. The EDS-P510A-8PoE series is designed especially for harsh outdoor applications with 3 kV surge protection to ensure uninterrupted reliability of PoE systems.

- · IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q) and TOS/DiffServ to increase determinism
- Port Trunking for optimum bandwidth utilization
- TACACS+, IEEE 802.1X, SNMPv3, HTTPS, and SSH to enhance network security
- Lock port function for blocking unauthorized access based on MAC address
- · SNMPv1/v2c/v3 for different levels of network management
- RMON for efficient network monitoring and proactive capability
- · Bandwidth management to prevent unpredictable network status
- · Port mirroring for online debugging
- · Automatic warning by exception through e-mail, relay output

SMTP, RARP, Telnet, Syslog, SNMP Inform, Flow Control, Back Pressure Flow Control

Filter: 802.1Q VLAN, Port-Based VLAN, GVRP, IGMP v1/v2, GMRP Redundancy Protocols: STP, RSTP, MSTP, Turbo Ring v1/v2, Turbo Chain, Link Aggregation

Security: RADIUS, TACACS+, SSL, SSH, Port Lock Time Management: SNTP, NTP Server/Client, IEEE 1588v2 PTP (software-based)

Industrial Protocols: EtherNet/IP, Modbus/TCP

MIB: MIB-II, Ethernet-Like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, Bridge MIB, RSTP MIB, RMON MIB Group 1, 2, 3, 9

Switch Properties

Priority Queues: 4 Max. Number of VLANs: 64 VLAN ID Range: VID 1 to 4094 IGMP Groups: 1024 MAC Table Size: 8 K Packet Buffer Size: 1 Mbit

Interface

RJ45 Ports: 10/100BaseT(X) or 10/100/1000BaseT(X) auto negotiation speed

Fiber Ports: 100/1000BaseSFP slot

Console Port: RS-232 (RJ45 connector) PoE Pinout: V+, V+, V-, V- for pin 1, 2, 3, 6 (Endspan, MDI, Mode A) DIP Switches: Turbo Ring, Master, Coupler, Reserve

Alarm Contact: 1 relay output with current carrying capacity of 0.5 A @ 48 VDC

Digital Inputs: 1 input with the same ground, but electrically isolated from the electronics.

• +13 to +30 V for state "1"

- -30 to +3 V for state "0"
- Max. input current: 8 mA

Power Requirements

Input Voltage: 48 VDC, redundant dual inputs Operating Voltage: 44 to 57 VDC Input Current: 5.36 A @ 48 VDC Overload Current Protection: Present Connection: 2 removable 2-contact terminal blocks Reverse Polarity Protection: Present Power Consumption: Max. 17.28 W full loading without PDs'

consumption
Power Budget:

Max. 240 W for total PDs' consumption Max. 36 W for each PoE port

Physical Characteristics

Housing: Metal

IP Rating: IP30 protection Dimensions: 79.2 x 135 x 105 mm (3.12 x 5.31 x 4.13 in) Weight: 1030 g (2.28 lb) Installation: DIN-rail mounting, wall mounting (with optional kit)

Dimensions

Environmental Limits

Operating Temperature: Standard Models: 0 to 60°C (32 to 140°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F) Storage Temperature: -40 to 85°C (-40 to 185°F) Ambient Relative Humidity: 5 to 95% (non-condensing)

Standards and Certifications


Safety: UL 508 Hazardous Location: UL/cUL Class 1 Division 2 EMC: EN 55032/24 EMI: CISPR 32, FCC Part 15B Class A EMS: IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m IEC 61000-4-4 EFT: Power: 2 kV: Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 1 kV IEC 61000-4-6 CS: Signal: 10 V IEC 61000-4-8 Traffic Control: NEMA-TS2 Rail Traffic: EN 50121-4 Shock: IEC 60068-2-27 Freefall: IEC 60068-2-32 Vibration: IEC 60068-2-6 Note: Please check Moxa's website for the most up-to-date certification status.

MTBF (mean time between failures)

Time: 710,166 hrs Standard: Telcordia (Bellcore), GB

Warrantv

Warranty Period: 5 years Details: See www.moxa.com/warranty

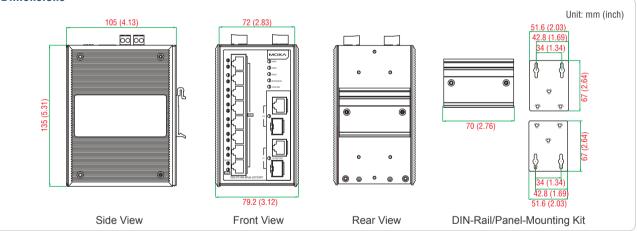

: Ordering Information

	Available Models -		Port Interface			
			Gigabit Ethernet	Fast Ethernet		
	Standard Temperature	Wide Temperature	Combo Port,			
	(-10 to 60°C)	(-40 to 75°C)	10/100/1000BaseT(X) or 100/1000BaseSFP*	PoE+, 10/100BaseT(X)		
	EDS-P510A-8PoE-2GTXSFP	EDS-P510A-8PoE-2GTXSFP-T	2	8		

*The EDS-P510A-8PoE series supports 2 100/1000BaseSFP slots. See the SFP-1G and SFP-1FE datasheets for Gigabit/Fast Ethernet SFP module product information.

Optional Accessories (can be purchased separately)

MXview: Moxa industrial network management software with 50, 100, 250, 500, 1000, or 2000 nodes EDS-SNMP OPC Server Pro: OPC server software that works with all SNMP devices

ABC-01: Configuration backup and restoration tool for managed Ethernet switches, 0 to 60°C operating temperature

DR-75-48/120-48: 75/120 W DIN-rail 48 VDC power supplies

DRP-240-48: 240 W DIN-rail 48 VDC power supplies

RK-4U: 4U-high 19-inch rack-mounting kit

WK-46: Wall-mounting kit, 2 plates with 8 screws

- Package Checklist —
- EDS-P510A-8PoE switch
- Serial Cable: CN20070Protective caps for unused ports
- Documentation and software CD
- Hardware installation guide (printed)
- Warranty card

SFP-1G Series

1-port Gigabit Ethernet SFP modules



- > Digital Diagnostic Monitor Function
- > -40 to 85°C operating temperature range (T models)
- > IEEE 802.3z compliant
- > Differential LVPECL inputs and outputs
- > TTL signal detect indicator
- > Hot pluggable LC duplex connector
- > Class 1 laser product, complies with EN 60825-1



: Specifications

Interface

Ethernet Ports: 1

Connectors: Duplex LC Connector or Simplex LC Connector (WDM-type only)

Optical Fiber

		Gigabit Ethernet SFP									
		SFF	P-SX	SFP	-LSX	SFP-LX	SFP-LH	SFP-LHX	SFP-ZX	SFP-EZX	SFP-EZX-120
Transceiver Type		Multi	-Mode	Multi	Mode	Single-Mode	Single-Mode	Single-Mode	Single-Mode	Single-Mode	Single-Mode
Fiber Cable Type		OM1	OM2	OM2	OM1	G.652	G.652	G.652	G.652	G.652	G.652
Typical Di	istance	300 m	550 m	1 km	2 km	10 km	30 km	40 km	80 km	110 km	120 km
	Typical (nm)	850		13	10	1310	1310	1310	1550	1550	1550
Wave- length	TX Range (nm)	830 to 860		1270 t	o 1355	1280 to 1355	1280 to 1355	1280 to 1340	1530 to 1570	1530 to 1570	1530 to 1570
longth	RX Range 770 to 860 (nm)		0 860	1260 t	o 1610	1260 to 1610	1100 to 1600				
	TX Range (dBm)	-4 to	9.5	-1 t	0 -9	-3 to -9	-3 to -8	+3 to -4	+5 to 0	+5 to 0	+3 to -2
Optical	RX Range (dBm)	0 to -18		-1 t	o -19	-3 to -21	-3 to -23	-1 to -24	-1 to -24	-9 to -30	-8 to -33
Power	Link Budget (dB)	8	.5	1	0	12	15	20	24	30	31
	Dispersion Penalty (dB)	4.3	3.6	5	5	1	1	1	1	1	2

Note: When connecting the SFP-LHX, ZX, EZX, or EZX-120, we recommened using an attenuator to prevent the transceiver from being damaged by excessive optical power.

		WDM Gigabit Ethernet SFP						
		SFP-10A	SFP-10B	SFP-20A	SFP-20B	SFP-40A	SFP-40B	
Transceiv	ver Type	Single-Mode		Single-Mode		Single-Mode		
Fiber Cable Type		G.652		G.652		G.652		
Typical Distance		10 km		20	km	40 km		
	Typical (nm)	TX 1310, RX 1550	TX 1550, RX 1310	TX 1310, RX 1550	TX 1550, RX 1310	TX 1310, RX 1550	TX 1550, RX 1310	
Wave- length	TX Range (nm)	1270 to 1355	1530 to 1570	1270 to 1355	1530 to 1570	1290 to 1330	1530 to 1570	
longtri	RX Range (nm)	1480 to 1580	1260 to 1360	1480 to 1580	1260 to 1360	1480 to 1580	1260 to 1360	
	TX Range (dBm)	-3 t	0 -9	-2 t	0 -8	+2 1	:0 -3	
Optical	RX Range (dBm)	-3 to	-21	-2 to -23		-1 to -23		
Power	Link Budget (dB)	1	2	15		20		
	Dispersion Penalty (dB)	:	2	:	3	1		

Note: WDM-type SFP modules must be used in pairs (e.g., SFP-1G10ALC and SFP-1G10BLC) Note: When connecting the SFP-40A and 40B, we recommend using an attenuator to prevent damage caused by excessive optical power.

Typical Distance: To reach the typical distance of specified fiber transceiver, please refer to formula: Link budget(dB) > dispersion penalty(dB) + total link loss(dB).

Power Requirements

Power Consumption: Max. 1 W

Environmental Limits

Operating Temperature: Standard Models: 0 to 60°C (32 to 140°F) Wide Temp. Models: -40 to 85°C (-40 to 185°F) Storage Temperature: -40 to 85°C (-40 to 185°F) Ambient Relative Humidity: 5 to 95% (non-condensing)


Standards and Certifications

Safety: CE, FCC, TÜV (EN 60825), UL 60950-1 Marine: DNV, GL

Dimensions



Warranty Period: 5 years Details: See www.moxa.com/warranty

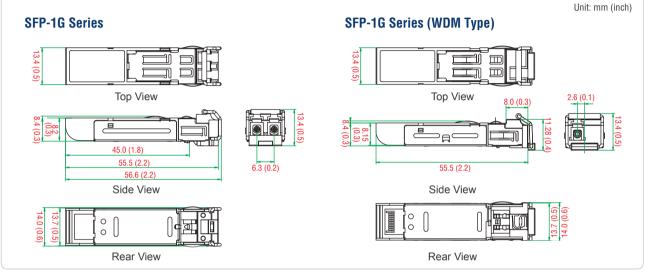

: Ordering Information

	Gigabit Ethernet SF	WDM Gigabit Ethernet SFP Models					
Standard Temperature Models (0 to 60°C)	Wide Temperature Models (-40 to 85°C)	Transeiver Type	Typical Distance	Standard Temperature (0 to 60°C)	Wide Temperature (-40 to 85°C)	Transeiver Type	Typical Distance
SFP-1GSXLC	SFP-1GSXLC-T*	Multi-Mode	300/550 m	SFP-1G10ALC	SFP-1G10ALC-T	Single-Mode	10 km
SFP-1GLSXLC	SFP-1GLSXLC-T	Multi-Mode	1/2 km	SFP-1G10BLC	SFP-1G10BLC-T	Single-Mode	10 km
SFP-1GLXLC	SFP-1GLXLC-T	Single-Mode	10 km	SFP-1G20ALC	SFP-1G20ALC-T	Single-Mode	20 km
SFP-1GLHLC	SFP-1GLHLC-T	Single-Mode	30 km	SFP-1G20BLC	SFP-1G20BLC-T	Single-Mode	20 km
SFP-1GLHXLC	SFP-1GLHXLC-T	Single-Mode	40 km	SFP-1G40ALC	SFP-1G40ALC-T	Single-Mode	40 km
SFP-1GZXLC	SFP-1GZXLC-T	Single-Mode	80 km	SFP-1G40BLC	SFP-1G40BLC-T	Single-Mode	40 km
SFP-1GEZXLC	-	Single-Mode	110 km	-	-	_	_
SFP-1GEZXLC-120	-	Single-Mode	120 km	-	-	-	-

*SFP-1GSXLC-T: -20 to 75°C operating temperature

Package Checklist -

- SFP-1G module
- Warranty card

SFP-1FE Series

1-port Fast Ethernet SFP modules



- > Digital Diagnostic Monitor Function
- > IEEE 802.3u compliant
- > Differential PECL inputs and outputs
- > TTL signal detect indicator
- > Hot pluggable LC duplex connector
- > Class 1 laser product; complies with EN 60825-1



: Specifications

Interface

Ethernet Ports: 1 Connectors: Duplex LC Connector Optical Fiber

			Fast Ethe	rnet SFP			
		SFI	Р-М	SFP-S	SFP-L		
Transceive	Transceiver Type		Mode	Single-Mode			
Fiber Cabl			62.5/125, 50/125 μm	G.652	G.652		
FIDEI GADI	етуре	OM1/OM2	800 MHz*km	0.002	0.002		
Typical Di	stance	2 km	4 km	40 km	80 km		
	Typical (nm)	1310		1310	1550		
Wave- length	TX Range (nm)	1280 t	o 1340	1280 to 1340	1530 to 1570		
	RX Range (nm)	1100 t	o 1650	1100 to 1600	1100 to 1600		
	TX Range (dBm)	-8 to	-18	0 to -5	0 to -5		
	RX Range (dBm)	-3 to -32		-3 to -34	-3 to -34		
Optical Power	Link Budget (dB)	14		29	29		
	Dispersion Penalty (dB)	2	3	1	1		

Note: When connecting the SFP-S or L, we recommend using an attenuator to prevent damage caused by excessive optical power.

Power Requirements Power Consumption: Max. 1 W Environmental Limits

: Ordering Information

Operating Temperature: -40 to 85°C (-40 to 185°F) Storage Temperature: -40 to 85°C (-40 to 185°F) Ambient Relative Humidity: 5 to 95% (non-condensing)


Standards and Certifications

Safety: CE, FCC, TÜV, UL 60950-1 Marine: DNV, GL

Warranty

Warranty Period: 5 years Details: See www.moxa.com/warranty





Available Models	Port Interface					
Wide Temperature	100BaseFX, Multi-Mode,	100BaseFX, Single-Mode,	100BaseFX, Single-Mode,			
(-40 to 85°C)	LC Connector, 4 km	LC Connector, 40 km	LC Connector, 80 km			
SFP-1FEMLC-T	1	-	-			
SFP-1FESLC-T	-	1	-			
SFP-1FELLC-T	-	-	1			
			Package Che			

• SFP-1FE module