


TDJ-5158P6AC×2

Dish Antenna

Technical Sheet

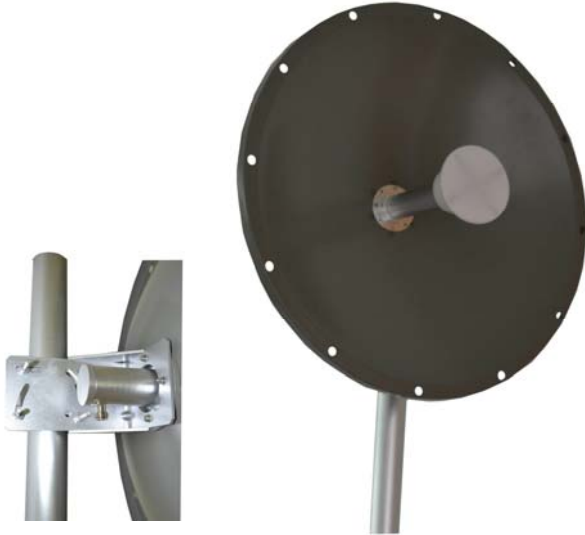


Applications

- 5.15-5.85GHz WLAN System
- Long-Range Directional Applications
- Wireless Bridges

Features

- High gain to 28.5 dBi
- Aluminum Reflector dish
- UV stable Light Gray Powder Coat Finish
- V/H Dual Polarization
- Easy to Assemble
- Standard Mounting Kits

Typical

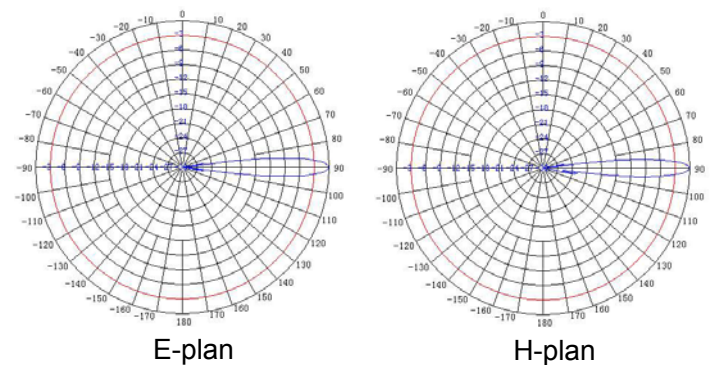

Specifications

Model	TDJ-5158P6AC×2
Freq. Range-MHz	5150~5850
Bandwidth-MHz	700
Gain-dBi	28.5
Beamwidth-°	E: 5 H:5
F/B Ratio-dB	≥35
Isolation-dB	≥28
VSWR	≤1.5
Impedance-Ω	50
Polarization	Vertical and Horizontal
Max. Power-W	100
Connector Type	N-Female / N-Female
Dimension-m	φ 0.6
Weight-Kg	3(Bracket included)
Pole Diameter-mm	φ 50~ φ 65



Kenbotong Communication LTD

Addr :NO.2 Chanxiu Road ,Foshan city,Guangdong China Code:528061
 Tel: 86(757)8202-5597, 8221-9788 Fax : 86(757)8221-2072,8802-2808
 Email: kbt@kenbotong.com web: <http://www.kenbotong.com>