

# IGPS-1080A



## Industrial 8-port slim type unmanaged Gigabit PoE Ethernet switch with 8x10/100/1000Base-T(X) P.S.E.

### Features

- Provides 8x10/100/1000Base-T(X) PoE (P.S.E.) ports
- Supports P.S.E. based on IEEE 802.3at standard up to 30 Watts per port
- Supports auto-negotiation and auto-MDI/MDI-X
- Supports store-and-forward transmission
- Supports flow control
- Rigid IP-30 housing design
- DIN-Rail and wall mounting enabled




### Introduction

IGPS-1080A is unmanaged PoE Ethernet switch with P.S.E. function. IGPS-1080A supports Power over Ethernet, a system to transmit electrical power, along with data, to remote devices over standard twisted-pair cable in an Ethernet network. IGPS-1080A switch has 8X10/100/1000Base-T(X) P.S.E. (Power Sourcing Equipment) ports. P.S.E. is a device (switch or hub for instance) that will provide power in a PoE setup. The wide operating temperature range from -40 to 70°C can satisfy most of operating environment. Therefore, the switch is one of the most reliable choices for PoE Ethernet application.


### Practical Operation

IGPS-1080A can be used in connecting several PoE P.D. Ethernet devices like IP-Camera or other Ethernet devices. In addition, there are two different power inputs at terminal block to avoid interruption caused by power down. When the primary DC power input fails, the backup power input will take over immediately to guarantee a non-stop operation.

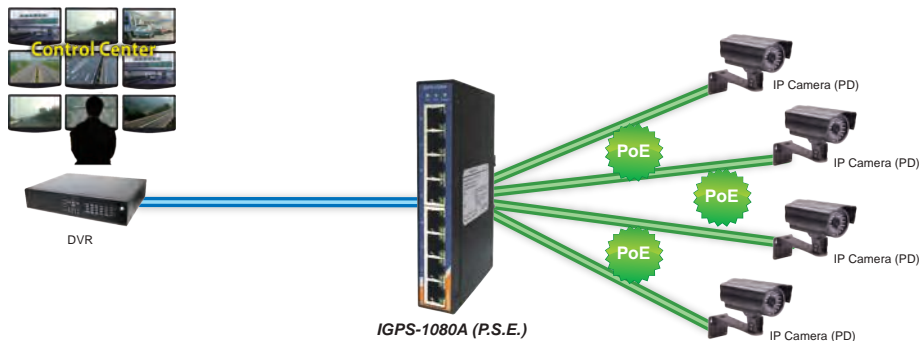

Connections of Ethernet devices

## Dimensions

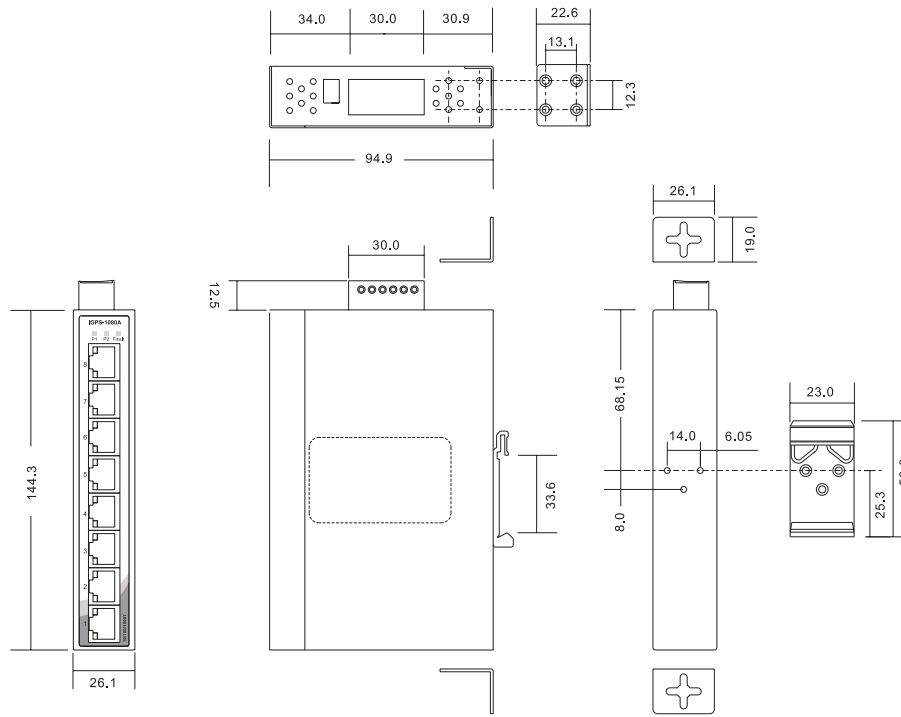

(Unit=mm)

## PoE Pin Assignment

10/100Base-T(X) P.S.E. RJ-45 Port	
RJ-45 Pin Definition	
Pin No.	Description
#1	TD+ with PoE Power input +
#2	TD- with PoE Power input +
#3	RD+ with PoE Power input -
#6	RD- with PoE Power input -

1000Base-T P.S.E. RJ-45 Port	
RJ-45 Pin Definition	
Pin No.	Description
#1	BI_DA+ with PoE Power input +
#2	BI_DA- with PoE Power input +
#3	BI_DB+ with PoE Power input -
#4	BI_DC+
#5	BI_DC-
#6	BI_DB- with PoE Power input -
#7	BI_DD+
#8	BI_DD-

## Specifications

ORing Switch Model	IGPS-1080A
<b>Physical Ports</b>	
10/100/1000Base-T(X) Ports in RJ45 With P.S.E.	8
<b>Technology</b>	
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow control IEEE 802.3at PoE specification (up to 30 Watts per port for P.S.E.)
MAC Table	2048 MAC addresses
Processing	Store-and-Forward

Industrial Ethernet Switch

Industrial Media Converter

Industrial Device Server

Industrial Wireless Access Point

Industrial Cellular VPN Router

Accessories

Network Management Utility

LED Indicators	
Power indicator	Green : Power LED x 2
Fault indicator	Amber : Indicates PWR1 or PWR2 failure occurred
10/100/1000Base-T(X) RJ45 port indicator and PoE indicator	Green for port Link/Act. Green for PoE power injected.
DIP-Switch	
DIP-Switch 1	Power-1 failed warning : (ON) enable, (OFF) disable
DIP-Switch 2	Power-2 failed warning : (ON) enable, (OFF) disable
Fault contact	
Relay	Relay output to carry capacity of 1A at 24VDC
Power	
Redundant Input power	Dual DC inputs. 50VDC on 6-pin terminal block.
Power consumption (Typ.)	8 Watts (power device not included)
Overload current protection	Present
Reverse polarity protection	<b>NOT Present</b>
Physical Characteristics	
Enclosure	IP-30
Dimensions (W x D x H)	26.1(W) x 94.9(D) x 144.3(H) mm
Weight (g)	390 g
Environmental	
Storage temperature	-40 to 85°C (-40 to 185°F)
Operating temperature	-40 to 70°C (-40 to 158°F)
Operating humidity	5% to 95% Non-condensing
Regulatory Approvals	
EMI	FCC Part 15, CISPR (EN55022) class A
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IEC60068-2-32
Vibration	IEC60068-2-6
Safety	EN60950-1
MTBF (Hours) (MIL-HDBK-217F2, GB, GC, 25°C)	131,977
Warranty	5 years

### Ordering Information

**IGPS-1 AA B A**

Code Definition	10/100/1000Base-T(X) P.S.E. Port Number	Additional Port Number
<b>Option</b>	<b>- 08:</b> 8 ports	<b>- 0:</b> 0 ports

Available Model	Model Name	Description
	IGPS-1080A	Industrial 8-port slim type unmanaged Gigabit PoE Ethernet switch with 8x10/100/1000Base-T(X) P.S.E.

**Packing List**

- IGPS-1080A
- DIN-Rail Kit
- Wall-mount Kit
- Quick Installation Guide

**Optional Accessories (Can be purchased separately)**

- DR-75-48, 75W DIN-Rail power supply
- DR-120-48, 120W DIN-Rail power supply
- SDR-240-48, 240W DIN-Rail power supply
- SDR-480-48, 480W DIN-Rail power supply